




DATE	October 2025	CODE	KLLED-M-I-3	E
------	--------------	------	--------------------	----------

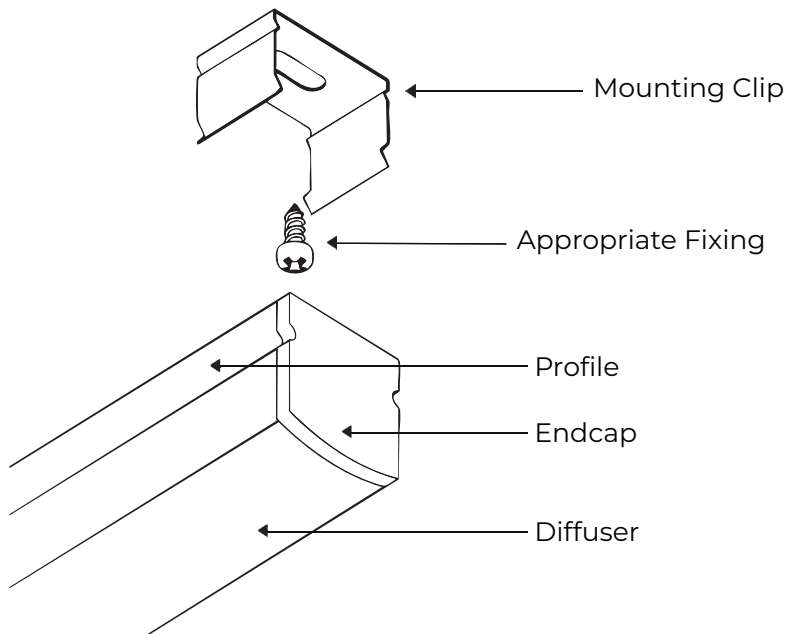

SUPPLIED PARTS




Classic 15 Profile




Mounting Clip


REQUIRED FOR INSTALLATION




Appropriate Fixing - see notes below
(1 per Bracket)

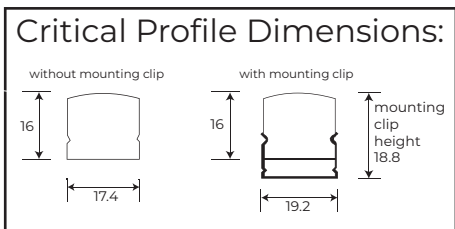

Dimensions in mm.

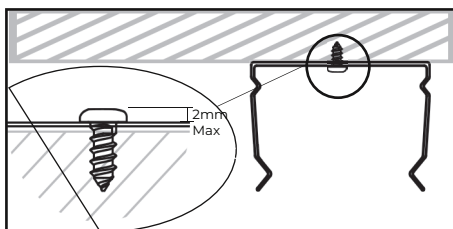

1. Mark and pre-drill screw holes prior to inserting mounting screws through Mounting Clips.

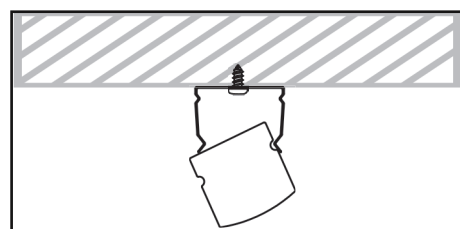

2. Tilt the fixture and push into rear of bracket to engage. Mounting Clip will flex to fit.

ESD Warning!


Always ensure to discharge yourself of all charge by touching a grounded, bare metal surface or approved anti-static mat before handling device. This product contains parts and assemblies susceptible to damage by electrostatic discharge.

Mounting Clip suggestions

- 0-1000mm = 2 mounting clips
- 1050- 1550mm = 3 mounting clips
- 1550- 2050mm = 4 mounting clips
- 2050- 2550mm = 5 mounting clips

NOTE:
Mounting fastener head should NOT be taller than ~2mm.

Appropriate fastener:
Most 4G / #4 screws
Pan head or CSK

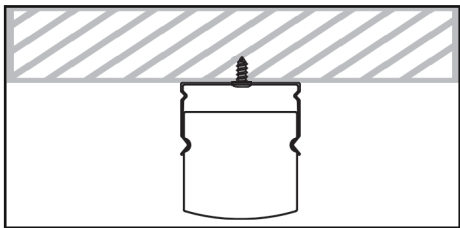


3. Pivot the front down and push firmly to engage the front of the bracket and snap-fit.

The Installation is now complete.


For continuous runs when assembly is required use a low odour + Low Bloom instant such as '**LOCTITE 460 INSTANT ADHESIVE**' or a similar adhesive for attaching endcaps to the end of the profile.

DATE	October 2025	CODE	KLLED-M-I-10	A
------	--------------	------	---------------------	----------


FIXED OUTPUT - TYPICAL WIRING CONFIGURATION

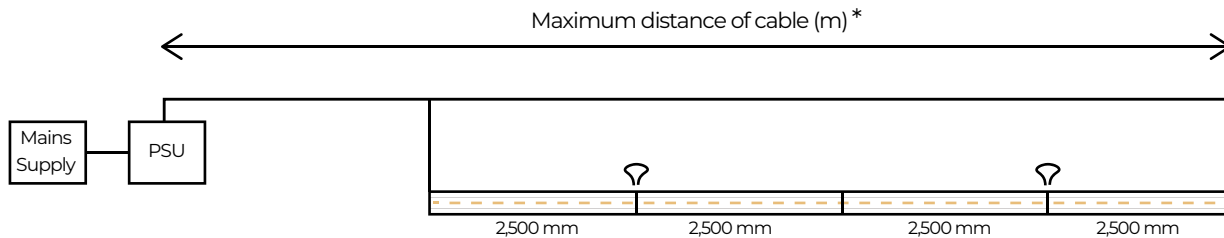

1-10V - TYPICAL WIRING CONFIGURATION

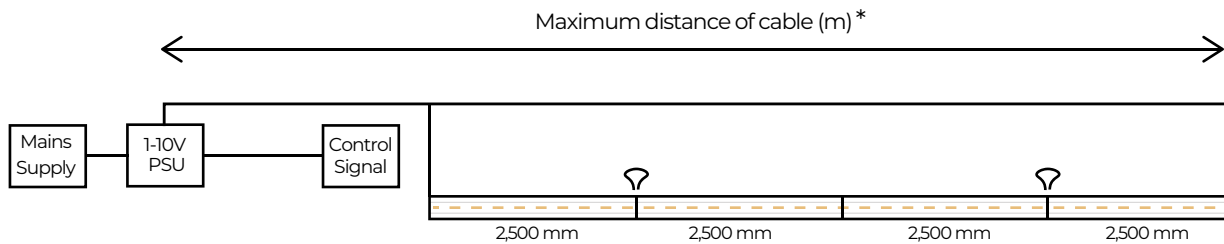

DALI / DMX / SWITCHDIM - TYPICAL WIRING CONFIGURATION USING SINGLE CHANNEL DRIVER

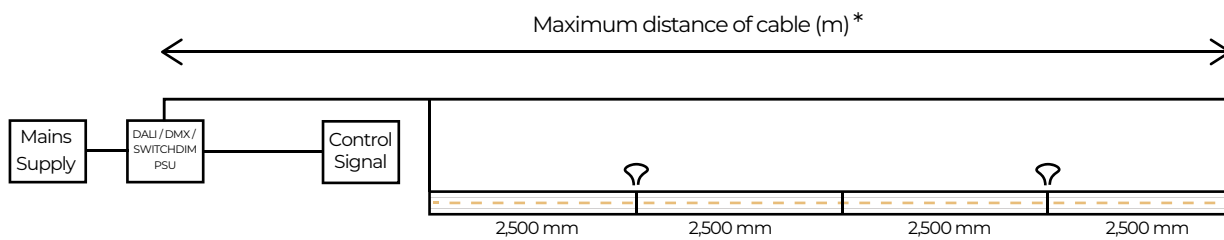

Cable Size (Gauge)	Wattage (Load per cable)				
	18W	35W	60W	100W	200W
0.5mm ²	24m	12m	7m	4m	2m
1.0mm ²	41m	21m	12m	7m	3m
1.5mm ²	60m	31m	18m	10m	5m
2.5mm ²	100m	51m	30m	18m	9m

Note, this table should allow for a voltage drop of no more than 5% - however, other factors may influence the exact result - so this should be used as a guide only.

24V Wiring to Driver

24V(+)

24V(-)

Tip - when using higher wattage drivers, it is often more practical to split the load from the LED driver into two or more cables allowing for smaller cable gauge size and/or longer distances between drivers and LED strip.




CAUTION:


To avoid voltage drop, ensure no more than 5000mm of Kove LED Mini connected together off one starter lead. For longer runs, you can connect multiple starter leads to appropriate sized cable per the cable size/wattage chart.

DATE	October 2025	CODE	KLLED-M-I-11	A
------	--------------	------	---------------------	----------

DALI DT6 / DALI DT8 - RGBW AND TUNABLE WHITE - TYPICAL WIRING CONFIGURATION USING DALI DRIVER

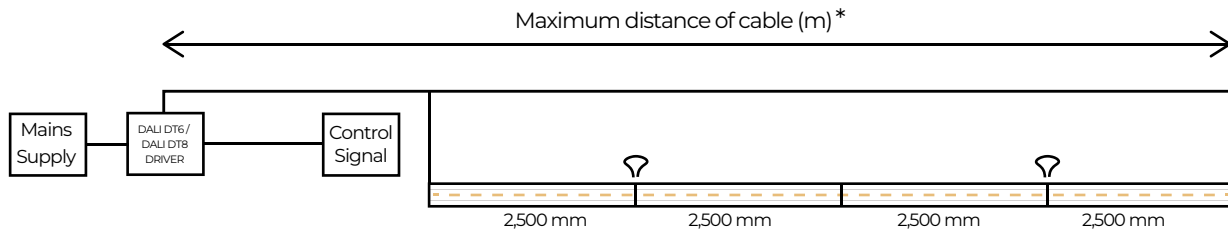

DMX - RGBW AND TUNABLE WHITE - TYPICAL WIRING CONFIGURATION USING DRIVER AND DMX CONTROLLER

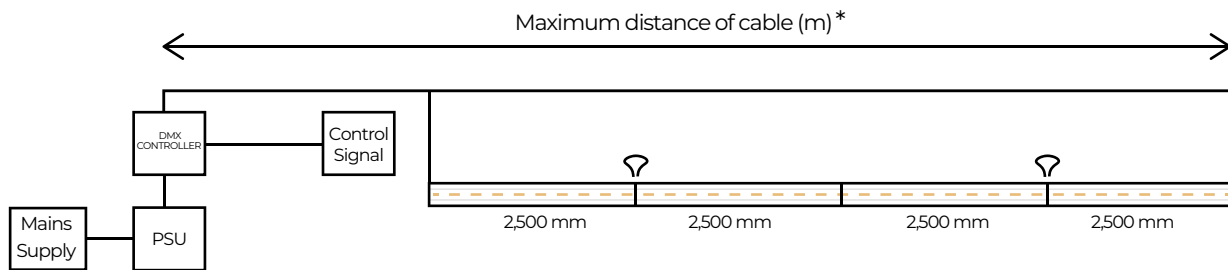

Cable Size (Gauge)	Wattage (Load per cable)				
	18W	35W	60W	100W	200W
0.5mm ²	24m	12m	7m	4m	2m
1.0mm ²	41m	21m	12m	7m	3m
1.5mm ²	60m	31m	18m	10m	5m
2.5mm ²	100m	51m	30m	18m	9m

Note, this table should allow for a voltage drop of no more than 5% - however, other factors may influence the exact result - so this should be used as a guide only.

RGBW Wiring Guide:

- 24V (+) = Black
- Red (-) = Red
- Green (-) = Green
- Blue (-) = Blue
- White (-) = White

Tunable White Wiring Guide:

- 24V (+) = Red
- Warm White (-) = Black
- Cool White (-) = Yellow

Tip - when using higher wattage drivers, it is often more practical to split the load from the LED driver into two or more cables allowing for smaller cable gauge size and/or longer distances between drivers and LED strip.



CAUTION:

To avoid voltage drop, ensure no more than 5000mm of Kove LED Mini connected together off one starter lead. For longer runs, you can connect multiple starter leads to appropriate sized cable per the cable size/wattage chart.