



DATE	April 2022	CODE	<b>KLLED-A-I-1</b>	<b>B</b>
PROJECT			TYPE	




**NOTE:**  
Dependent on module configuration (IE. driver QTY and TYPE).

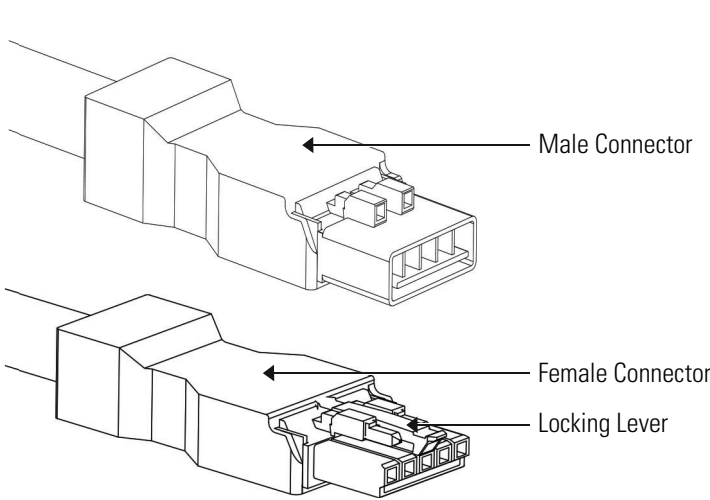


**Caution:**  
Split circuits to be utilized on long runs. Maximum interconnected run length should not exceed 60 meters.

KLLED-A-112 - 0.07A	KLLED-A-119 - 0.08A
KLLED-A-212 - 0.11A	KLLED-A-219 - 0.16A
KLLED-A-312 - 0.18A	KLLED-A-319 - 0.24A
KLLED-A-412 - 0.21A	KLLED-A-419 - 0.31A
KLLED-A-512 - 0.26A	KLLED-A-519 - 0.40A

Fixture Amps determine the run length possibility.

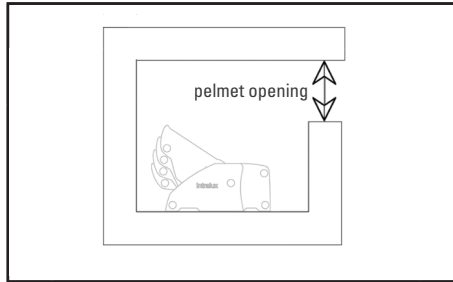


Placement in pelmet.

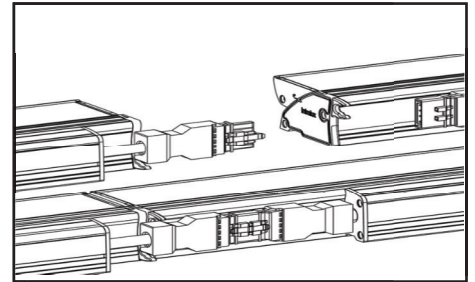


1. Align light fixtures next to each other and connect lights by using the 'PLUG + GO' system.

Make sure the Locking Lever is in the correct position and that the connection is firm.

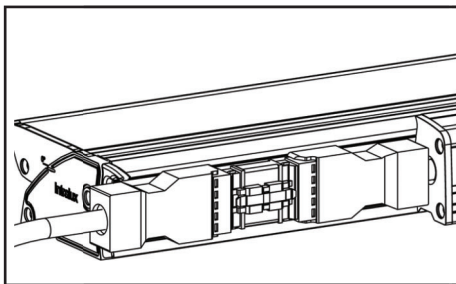


2. Connect the starter lead to the first module of run length.

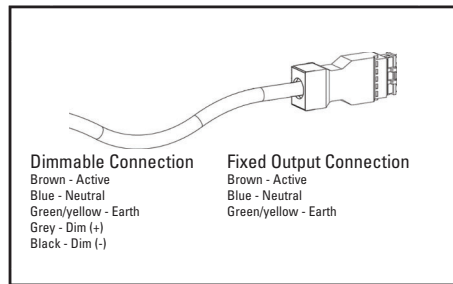


3. Connect the open end of the start lead to building/control wiring.

DATE	June 2022	CODE	<b>KLLED-A-I-2</b>	<b>C</b>
PROJECT		TYPE		

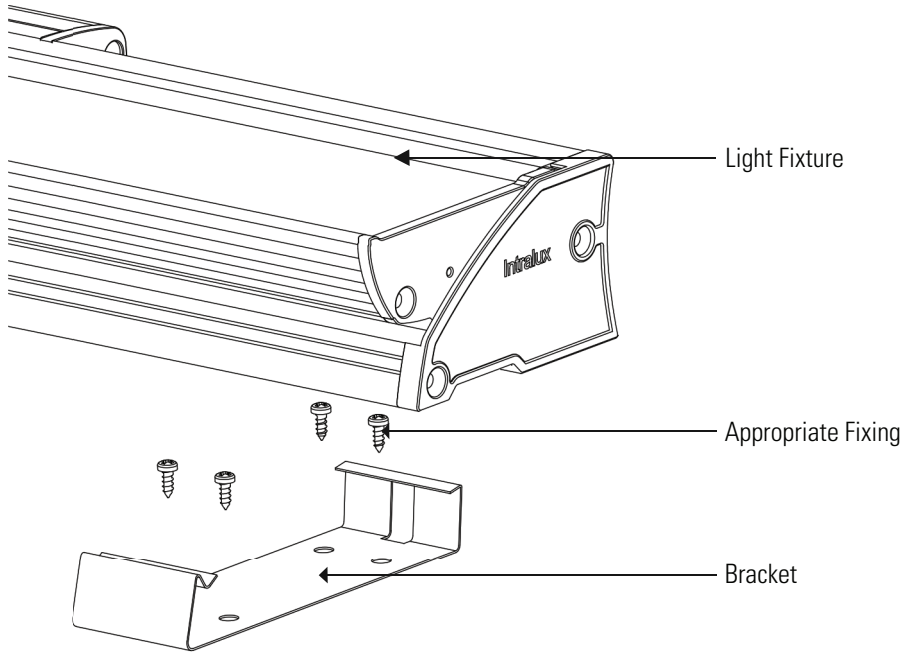

## Supplied parts



Bracket


## Required for Installation




Appropriate Fixing  
(4 per Bracket)




Philips Head  
Screwdriver

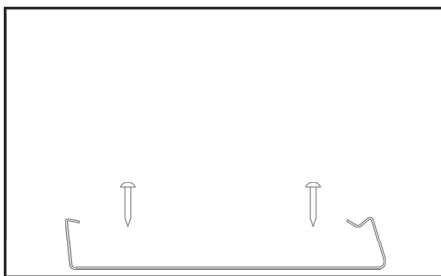


1. Install screws through the four holes in the mounting bracket to secure to surface. Screw head height is to be 4mm.

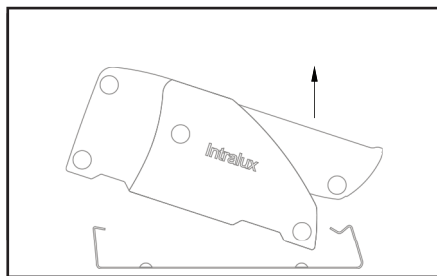

2. Adjust the fixture one adjustment notch up then tilt the fixture backward and lush until the rear of the bracket engages.

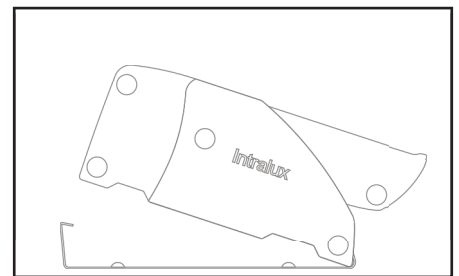

3. Pivot the front down and push firmly to engage the front of the bracket.

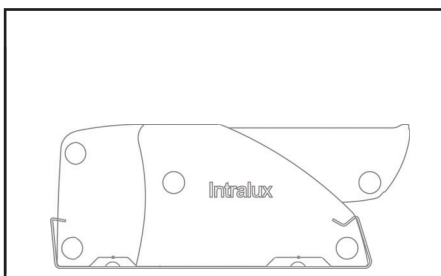

4. Press up and inward on the front leg of the mounting bracket ensuring that the end seats firmly in the corresponding channel.