

<b>Mounting</b>	
Location	Suspended Pendant
Ingress Protection	IP20
<b>Electrical</b>	
Input Voltage	220-240Vac 50/60Hz
Dimming	Fixed Output, DALI & Push Dim, Casambi
Driver Location	Integral
Compatible Track Systems	Clear Flex 2000mm
Suspension Points	2
Suspension Type	Wire suspension kit - Chrome (as standard). White / Black also available.

**Dimension**

Length	1130mm
Width	150mm
Height	22mm
Weight	2.1kgs

**Light**

	<b>30W</b>	<b>42W</b>	<b>59W</b>
Luminaire Power (Typical)	31.6W	45W	63.9W
Luminaire Lumens	3659 lms	5011 lms	6951 lms
LED Power (Typical)	29.4W	42.2W	59.2W
LED Lumens	4553 lms	6326 lms	8687 lms
#Lumens - 4000K Black Louver			

Colour Temperature	2700K / 3000K / 3500K / 4000K
CRI/R9	90 / 50+

Beam Angle Louver Black - 80° / Louver White - 80° / Louver Mirror - 80°

Binning (SDCM)	3
LM-80/TM-21 Lifespan	L80 B10 > 72,000 / L90 B10 > 42,000 hours
Max. Verified Ambient Temperature	40°C

**Finishes**

Outer White Texture / Black Texture / Bronze Texture / Metallic Silver / Metallic Gold  
Ceiling Rose Colour matched to luminaire

## SPECIFICATION CODE

PRODUCT  
**DUET**

MODEL  
**P**

(P)  
Pendant

WATTAGE  
**59**

(30) 3659 lms  
(42) 5011 lms  
(59) 6951 lms

COLOUR  
TEMPERATURE  
**930**

(927) 2700K  
(930) 3000K  
(935) 3500K  
(940) 4000K

BEAM  
**LB8**

(LB8) Louver Black - 80°  
(LW8) Louver White - 80°  
(LM8) Louver Mirror - 80°

FINISH  
**WT**


(WT) White Texture  
(BT) Black Texture  
(BRT) Bronze Texture  
(MS) Metallic Silver  
(MG) Metallic Gold

DIMMING  
**DALI**




(F) Fixed Output  
(DALI) DALI & Push Dim  
(CAS) Casambi

## COLOUR METRICS


3000K

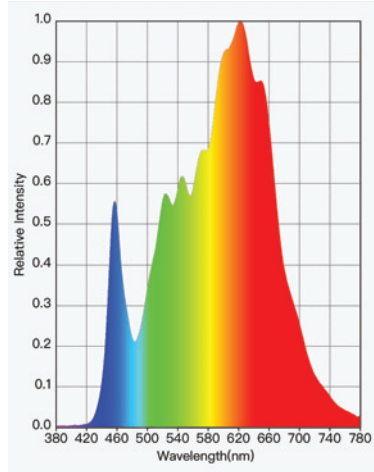

4000K

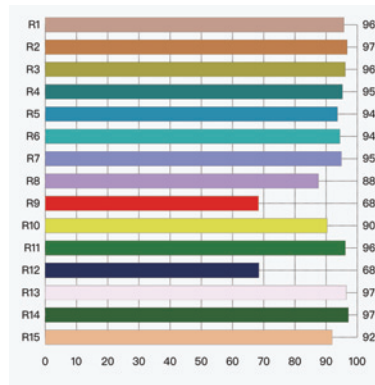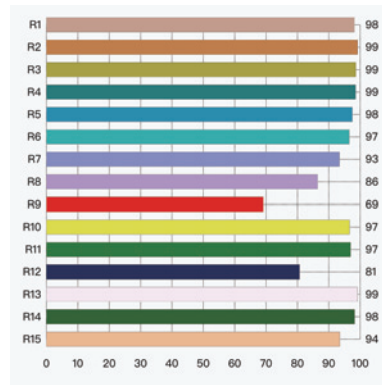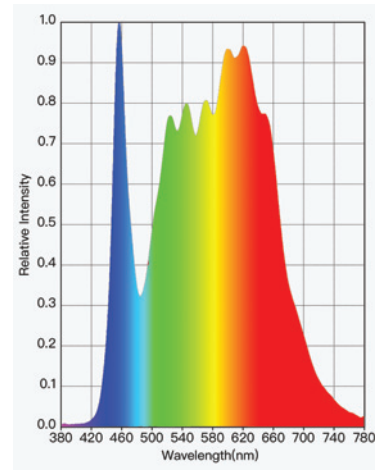

## PHOTOMETRIC DATA

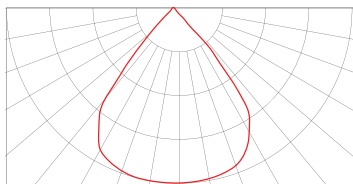

Louver - 80°

## COMPLIANCE

EN 55015:2019+A11:2020  
 AS/NZS CISPR15:2017  
 IEC/EN 60598-1:2020  
 IEC/EN 60598-2-1:2014+A1:2015



CASAMBI