


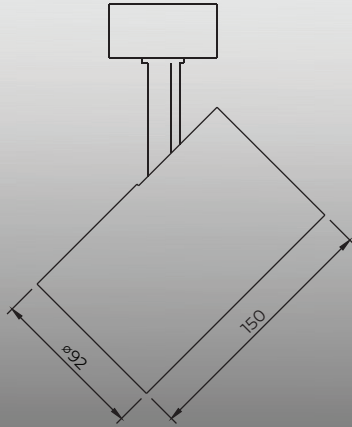

Mounting	
Location	Surface Mount
Type	Mounting Bracket Supplied with Luminaire
Ingress Protection	IP20

Electrical	
Input Voltage	220-240Vac 50/60Hz
Dimming	Fixed Output, DALI & Push Dim, Casambi
Driver Location	Integral

Dimension	
Length	150mm
Diameter	92mm
Weight	0.75kgs

Light	12W	18W
Luminaire Power (Typical)	14.5W	20.1W
Luminaire Lumens	1487 lms	2124 lms
LED Power (Typical)	12.4W	18.1W
LED Lumens	1885 lms	2693 lms

#Lumens based on Medium Beam - 4000K

Colour Temperature	2700K / 3000K / 3500K / 4000K
CRI/R9	93 / 50+
Beam Angle	Wallwasher
Binning (SDCM)	2
LM-80/TM-21 Lifespan	L90 B10 > 60,500 hours
Max. Verified Ambient Temperature	40°C
Finishes	White Texture / Black Texture / Bronze Texture / Metallic Silver / Metallic Gold

SPECIFICATION CODE

PRODUCT
ENLEDS

MODEL
SM

(SM)
Surface
Mount

WATTAGE
18

(12)
1487 lms
(18)
2124 lms

COLOUR
TEMPERATURE
930

(927) 2700K
(930) 3000K
(935) 3500K
(940) 4000K

BEAM
WW

(WW) Wallwasher







FINISH
BT

(WT) White Texture
(BT) Black Texture
(BRT) Bronze Texture
(MS) Metallic Silver
(MG) Metallic Gold


DIMMING
DALI

(F) Fixed Output
(DALI) DALI & Push Dim
(CAS) Casambi

COLOUR METRICS

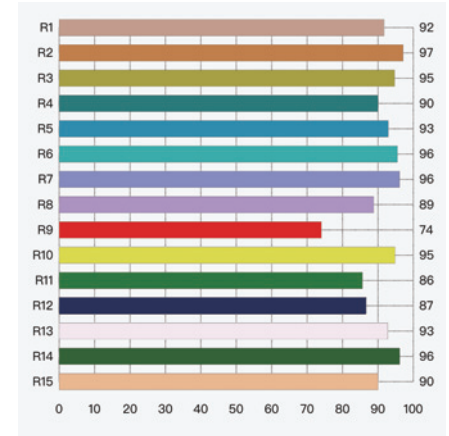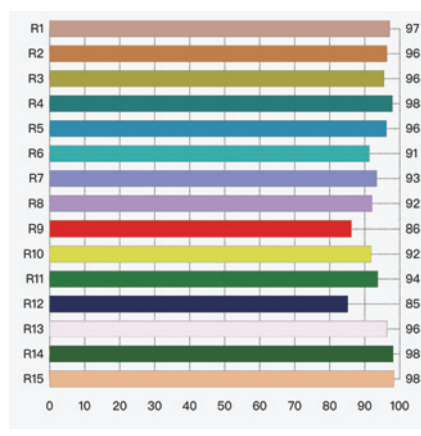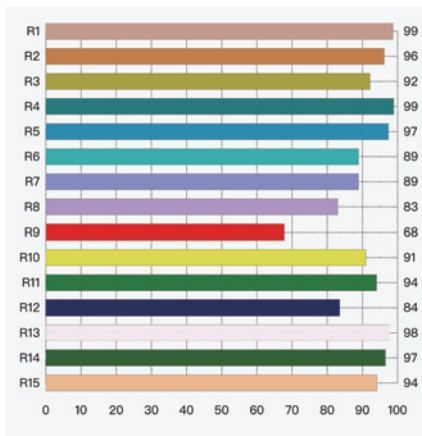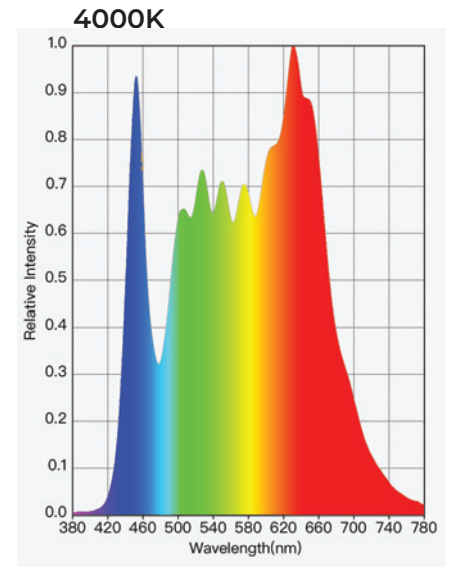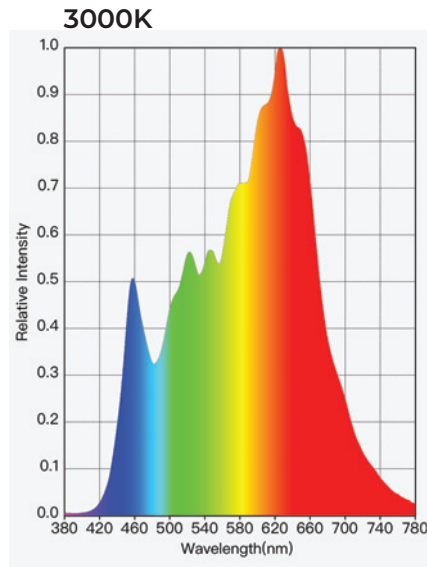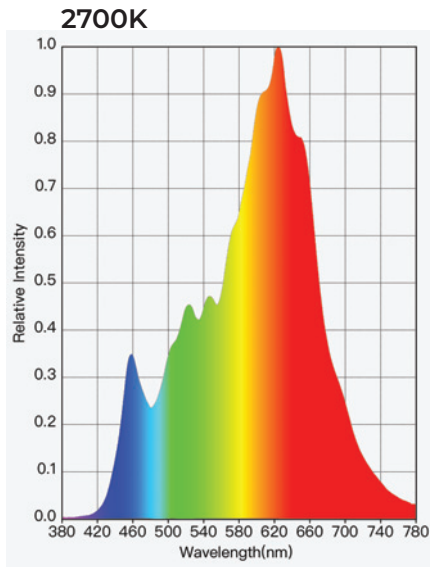

PHOTOMETRIC DATA

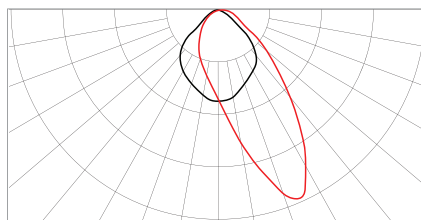

Wallwasher (WW)

COMPLIANCE

EN 55015:2019+A11:2020
AS/NZS CISPR15:2017
IEC/EN 60598-1:2020
IEC/EN 60598-2-1:2014+A1:2015
AS/NZS: 1680.2.5:2018 (4000K only)



CASAMBI