


DATE	April 2015	CODE	<b>DS-ENLEDX02-EU</b>	<b>E</b>
PROJECT		TYPE		

## 1. CUT HOLE




Hole cut out size : XS: 88mm~  
XL: 152mm~

## 2. IDENTIFY & PREPARE POWER SUPPLY

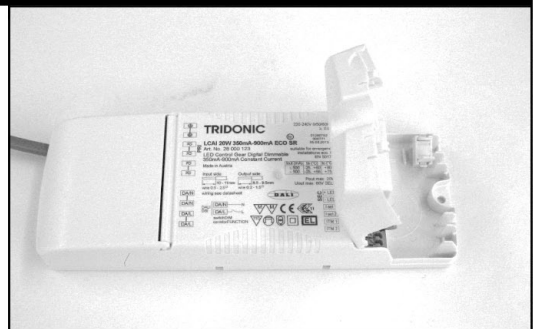

Identify the suitable driver for each fixture. Refer to product label on downlight for driver type provided. Lift the covers from the power supply and prepare for wiring connections.

## 3. CONNECT WIRING TO POWER SUPPLY

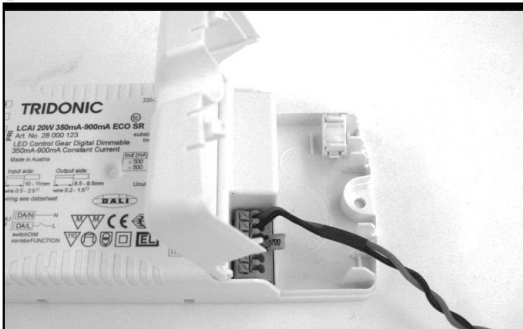

Connect the LED wires to the power supply. Red wire is the positive (+). Black wire is the negative (-). Connect dimming wires according to driver wiring diagram. Refer to driver techsheet for more info.

## 4. ATTACH COVER




Locate strain reliefs underneath the driver covers. Secure the wires by pushing down strain relief firmly. Close the covers by pushing them down firmly.

## 5. COMPLETE SYSTEM



Complete system ready to be installed.

## 6. INSTALLED

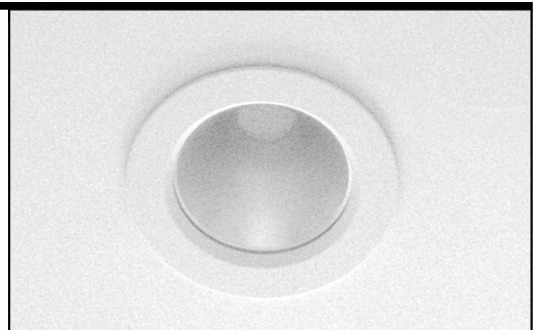

Installed in ceiling. Ensure nothing is covering the heat sink. Minimum clearance between back of heatsink and roof is 40mm for XS fittings and 60mm for XL fittings.