




FLARE - WALL WASHER



TECHNICAL INFORMATION

DATE	April 2008	CODE	FWT5-TI-1-EU	A
PROJECT		TYPE		

Photometric Data

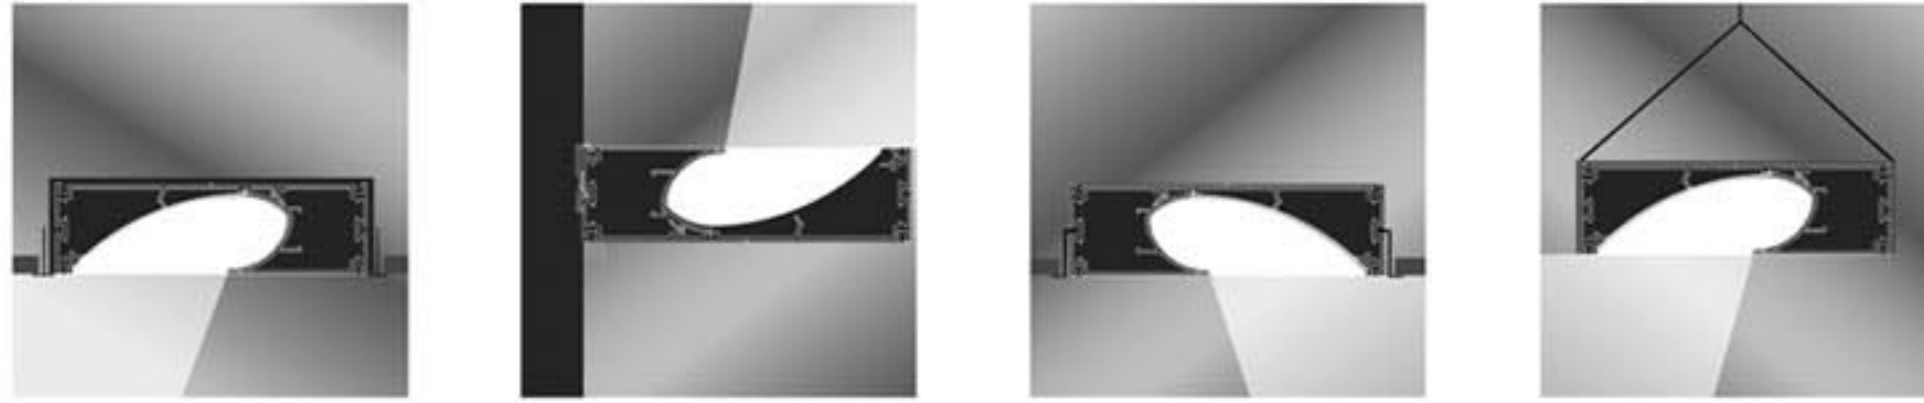

Grid Ceiling Wall mount Plasterboard Single suspended down

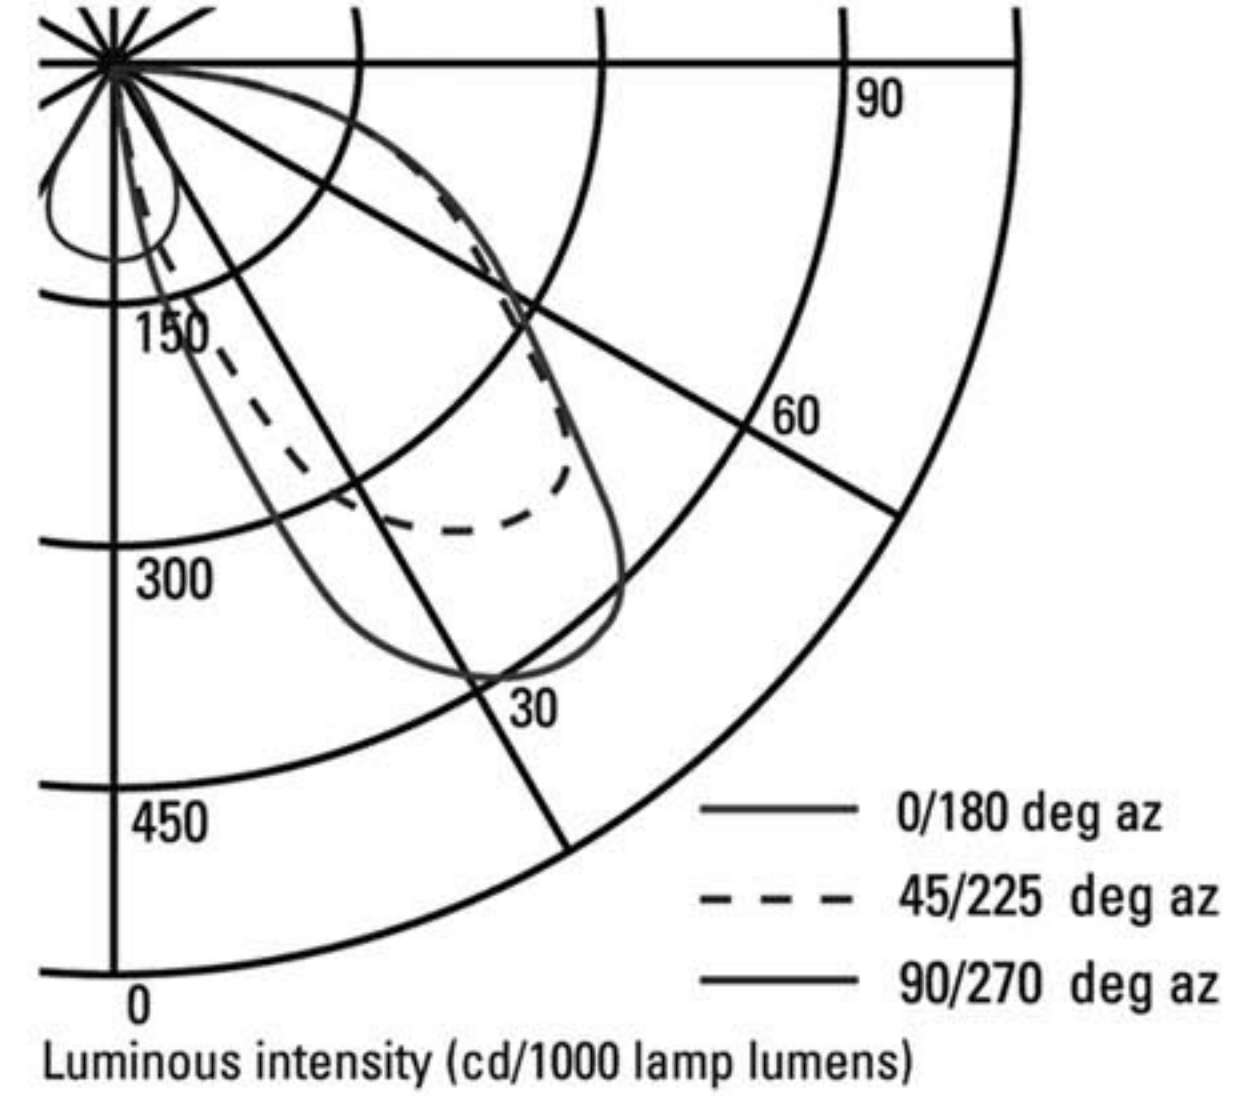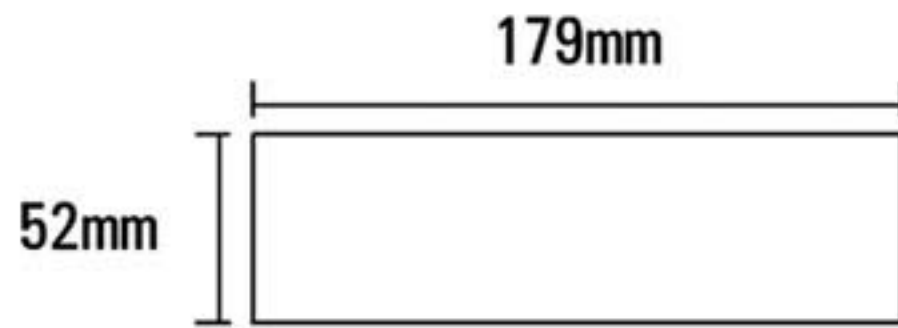

Flare T5	Plasterboard, Recessed and Suspended Versions									Suspended Versions only	
	FWT5114	FWT5121	FWT5128	FWT5135	FWT5124	FWT5139	FWT5154	FWT5180	FWT5254	FWT5235	
Flare T5 modules FWT5											
Lamp Configurations	1x14 Watt	1x21 Watt	1x28 Watt	1x35 Watt	1x24 Watt	1x39 Watt	1x54 Watt	1x80 Watt	2x54 Watt	2x35 Watt	
Nominal Length	587	887	1187	1487	587	887	1187	1487	2363	2963	
Watts (HF/HFD Ballasts)*	16/18	23.5/25	30.5/33	38.5/40	27/27	42/45	61/61	86/88	118/122	78/80	
Amps (HF/HFD Ballasts)*	0.07/0.09	0.11/0.12	0.13/0.16	0.17/0.19	0.12/0.12	0.2/0.2	0.2/0.27	0.37/0.38	0.52/0.52	0.34/0.38	
Maximum System Amps*	Maximum system load not to exceed 10A. Systems in excess of 10A to be electrically split.										
Lamp Type	16mm Fluorescent T5										
Total lamp lumen output**	1350	2100	2900	3650	2000	3500	5000	7000	10000	7300	

Mounting option codes: **TK** c/w Trim kit for plasterboard **GC** Grid ceiling **WM** c/w Wall mount bracket **SPSD** Suspended version starter unit c/w 3m suspension and 3m cable for down-lighting **SPSU** Suspended version starter unit c/w 3m suspension and 3m cable for up-lighting **SPC** Suspended version interconnecting c/w 3m suspension

* Manufacturers claim. Includes energy losses where applicable

** T5 Fluorescent lamps @ 100 hours use. Manufacturers claim

Ballast Options


High Frequency Dimmable
High Frequency

Code HFD
Code HF

Ballast options available.
Contact your nearest Intralux Distributor for information on individual ballast systems.

Ordering Flare

Simply specify the Product Code utilising the following information:

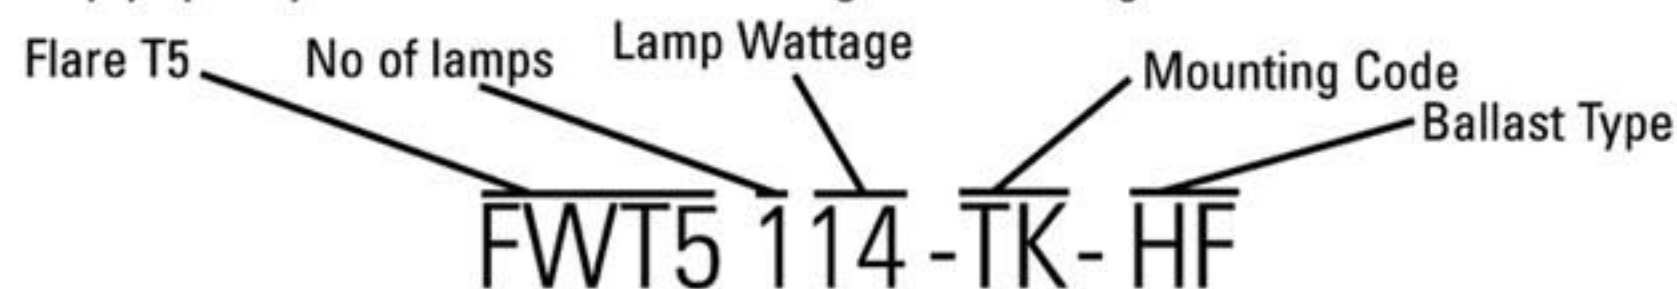

Conformity

Designed and built to comply with appropriate International Standards.

IP30



IP (International Protection) indicates the degree of protection to the ingress of solids and liquids.

Design Features



Intralux Australia Pty Limited 23 Enterprise Street, PO Box 557, Richlands, Brisbane, Queensland, 4077, Australia
Tel: +61 7 3375 9333 Fax: +61 7 3375 9444 Email: info@intralux.com Web: www.intralux.com

Design and Trade Mark registrations pending. Intralux Products are designed and built to comply with appropriate International Standards. All brand names on this brochure are Trade Marks of their respective holders. Some of the images in this brochure are computer generated representations. Intralux Australia reserves the right to alter the designs and specifications of these products without notice. FWT5-TI-1-EU April 2008 E&OE

