





# KOVE LED ADJUSTABLE - INDIRECT LIGHTING SYSTEM

DATE	February 2017	CODE	<b>KLA-T1-1-EU</b>	<b>K</b>
PROJECT		TYPE		

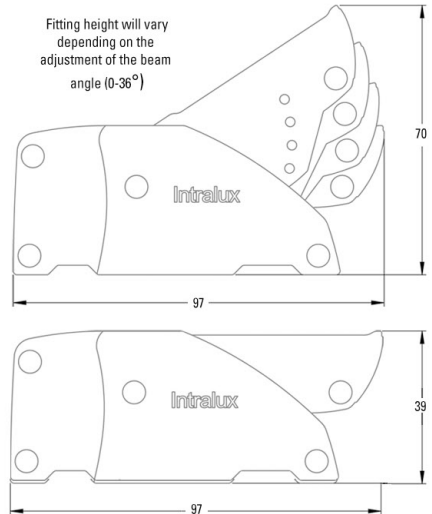

**Kove LED Adjustable** is amongst the latest generation of Intralux's indirect cove lighting family featuring high performance, reliability and unparalleled colour characteristics of the latest Phillips LED technology. As with all **Intralux Kove** products, **Kove LED Adjustable** features fully integrated control gear, easy 'plug+go' installation and fully dimmable drivers. **Kove LED Adjustable** incorporates a specially designed optical package including a precise reflector and LED module configuration - resulting in both high output as well as the famously smooth light distribution of the **Intralux Kove** products.

## Photometrics - Semi Asymmetric beam

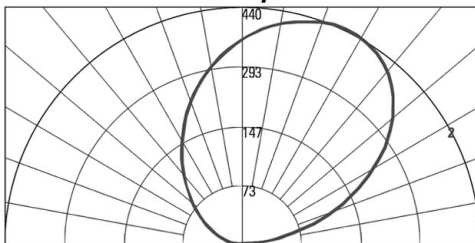

LED Module Type	Tridonic / Philips
LED Module Wattage	HE: 9.8 HO: 18.1
Light Distribution	Semi-Asymmetric
LED Module Life	L70: 50,000 Hours
CRI	MIN 80
LED Colour (K)	2700 / 3000 / 4000
Fixture Lumens Per Meter*	HE: 2,169 HO: 3,585
Fixture Efficacy (lm/W)*	HE: 123 HO: 110
Fixture Wattage Per Meter (W)	HE: 17.5 HO: 32.3
Max. Interconnected Run Length	60m****

Product Code	KLLED-A-112	KLLED-A-212	KLLED-A-512	KLLED-A-119	KLLED-A-219	KLLED-A-519
Actual Fixture Length (mm)	588mm	1,148mm	2820mm	588mm	1148mm	2820mm
LED Module Configuration***	1 x 9.8W	2 x 9.8W	5 x 9.8W	1 x 18.1W	2 x 18.1W	5 x 18.1W
Fixture Lumens	1,258	2,516	6,290	2,080	4,159	10,397
Fixture Wattage	9.8W	19.6W	49W	18.1W	36.2W	90.5W
Fixture System Amps	0.05A	0.1A	0.25A	0.08A	0.16A	0.4A
Input Voltage	220-240V 50/60Hz					
Housing Material & Finish	Satin Black Anodized Aluminium					
Dimming	Fixed Output/DALI/DSI**					

\* calculated data values only based on 4000K  
 \*\* dimming range limited by driver manufacturer

\*\*\* Short 'infill module' of 295mm is available on a project basis.  
 \*\*\*\*Dependant on module configuration and driver quantity & type.



**Intralux Australia Pty Limited (ABN 70 010 644 694)** 10/31 Acanthus Street, Darra, QLD 4076 Australia  
 Tel: +61 7 3375 9333 Fax: +61 7 3375 9444 Email: info@intralux.com Web: www.intralux.com

Design and Trade Mark registrations pending. Intralux Products are designed and built to comply with appropriate International Standards. All brand names on this brochure are Trade Marks of their respective holders. Some of the images in this brochure are computer generated representations. Intralux Australia reserves the right to alter the designs and specifications of these products without notice.

20170220 E&OE

