




KOVE LED MINI


INSTALLATION GUIDE

DATE	May 2016	CODE	DS-KLLED-M02-EU	A
PROJECT		TYPE		

FIXED OUTPUT - TYPICAL WIRING CONFIGURATION

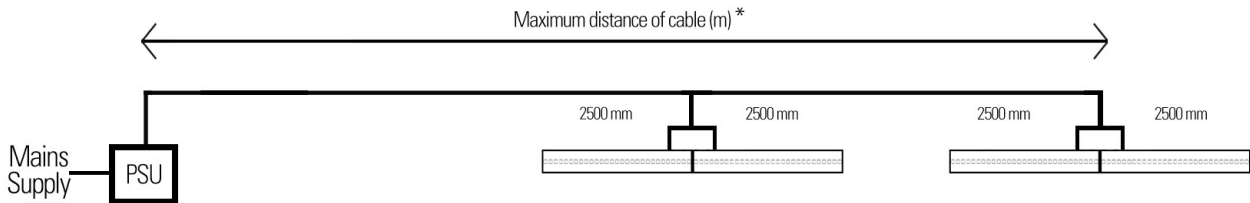


1-10V - TYPICAL WIRING CONFIGURATION

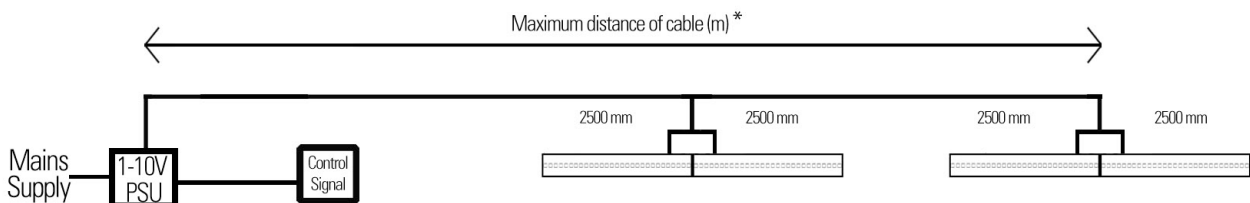

DALI / DMX / SWITCHDIM - TYPICAL WIRING CONFIGURATION

USING SINGLE CHANNEL DRIVER

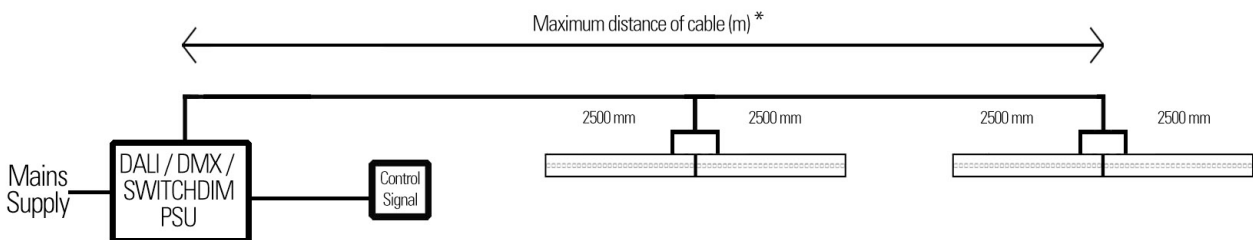

* Power supply unit (PSU) output cable size	0.5mm ²	9m
(mm ²) / Max distance (m) recommendations:	0.75mm ²	14m
	1.0mm ²	19m
	1.5mm ²	28m

CAUTION: All LED Drivers for Kove LED Mini must be installed using a centre-feed method.

For KLLED-M-17 & KLLED-M-24, no more than 2.5 metres should be interconnected in each direction.

For KLLED-M-12, no more than 5 metres should be interconnected in each direction.



Intralux Australia Pty Limited 10/31 Acanthus Street, Darra, Queensland 4076 Australia
 Tel: +61 7 3375 9333 Fax: +61 7 3375 9444 Email: info@intralux.com Web: www.intralux.com

Design and Trade Mark registrations pending. Intralux Products are designed and built to comply with appropriate International Standards. All brand names on this brochure are Trade Marks of their respective holders. Some of the images in this brochure are computer generated representations.

Intralux Australia reserves the right to alter the designs and specifications of these products without notice. DS-KLLED-M02-EU 20160511

E&OE

