




KOVE LED MINI

INSTALLATION GUIDE

DATE	September 2016	CODE	DS-KLLED-M03-EU	A
PROJECT		TYPE		


DALI / DMX TUNABLE WHITE - TYPICAL WIRING CONFIGURATION

USING SINGLE CHANNEL DRIVER AND DALI / DMX CONTROLLER

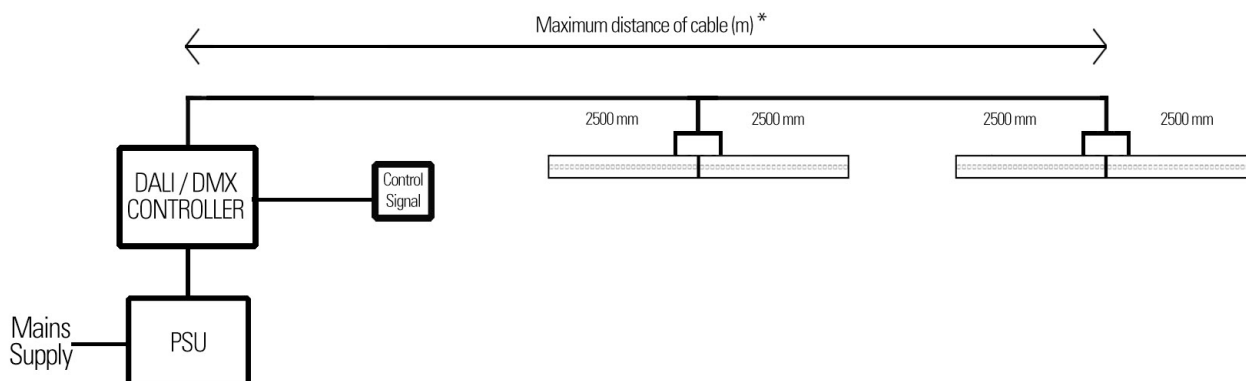

DMX RGB - TYPICAL WIRING CONFIGURATION

USING SINGLE CHANNEL DRIVER AND DMX CONTROLLER

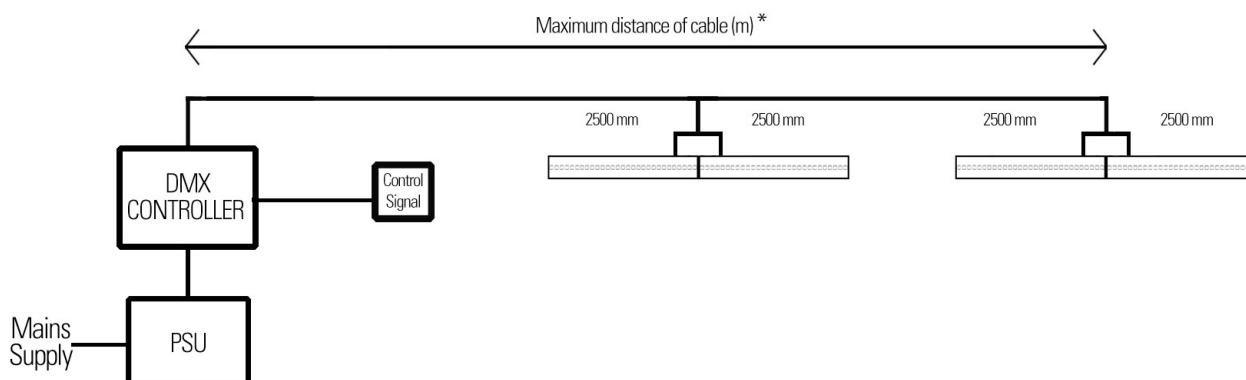

* Power supply unit (PSU) output cable size (mm ²) / Max distance (m) recommendations:	0.5mm ²	9m
	0.75mm ²	14m
	1.0mm ²	19m
	1.5mm ²	28m

CAUTION:

FOR SINGLE FIXTURES: LED Driver can be installed at either end of fixture.

FOR 2+ FIXTURES: LED Drivers must be installed using a centre-feed method - centre of run.

For **KLLED-M-TW** - no more than 2.5 metres should be interconnected in each direction.

For **KLLED-M-RGB**, no more than 5 metres should be interconnected in each direction.

