



DATE	June 2022	CODE	KLLED-M-I-11	D
PROJECT		TYPE		

DALI DT6 / DALI DT8 - RGBW AND TUNABLE WHITE - TYPICAL WIRING CONFIGURATION USING DALI DRIVER

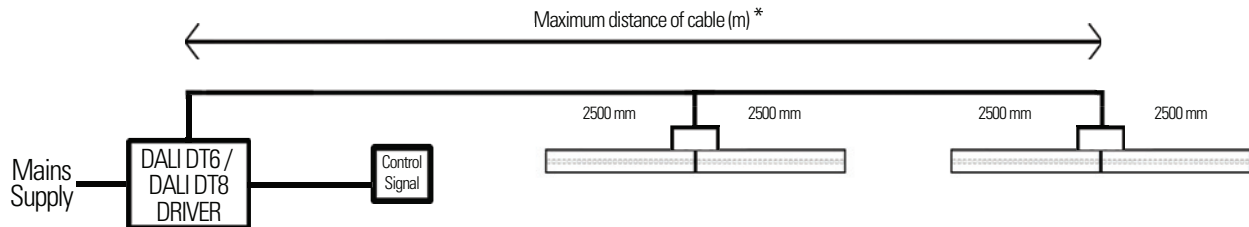

DMX - RGBW AND TUNABLE WHITE - TYPICAL WIRING CONFIGURATION USING DRIVER AND DMX CONTROLLER

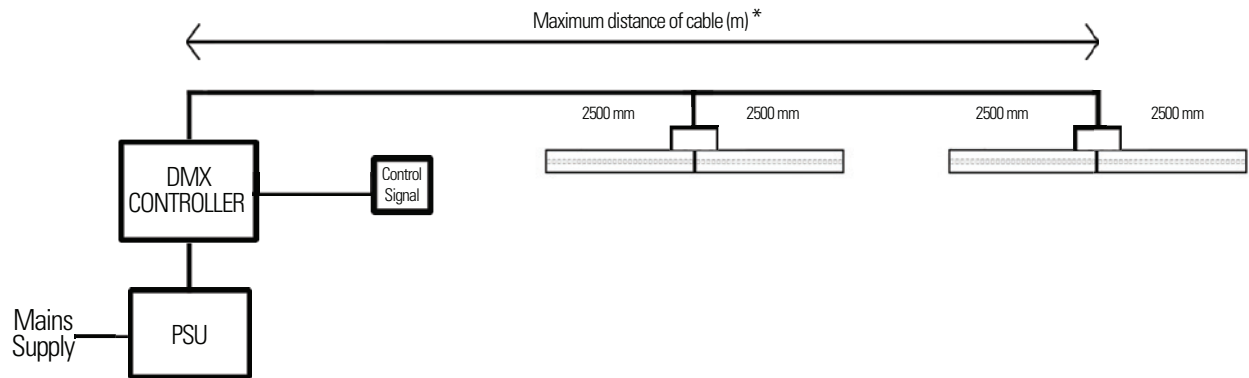

* Power supply unit (PSU) output cable size (mm ²) / Max distance (m) recommendations:	0.5mm ²	9 metres
	0.75mm ²	14 metres
	1.0mm ²	19 metres
	1.5mm ²	28 metres



CAUTION:

FOR SINGLE FIXTURES: LED Driver can be installed at either end of fixture.
 FOR 2+ FIXTURES: LED Drivers must be installed using a centre-feed method - centre of run.
 For **KLLED-M-TW** - no more than 5 metres should be interconnected in each direction.
 For **KLLED-M-RGBW**, no more than 5 metres should be interconnected in each direction.