




KOVE LED PROFESSIONAL - INDIRECT LIGHTING SYSTEM


DATE	February 2017	CODE	KLP-T1-1-EU	C
PROJECT		TYPE		

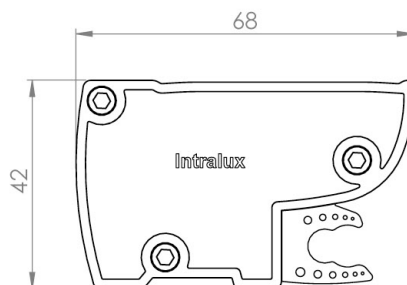

Kove LED Professional is amongst the latest generation of Intralux's indirect cove LED lighting family. **Kove LED Professional** offers the same high performance qualities as other Kove LED family members, but in a smaller, more streamlined package. **Kove LED Professional** is powered by Tridonic/Philips and features a semi asymmetric beam direction which offers the famously smooth light distribution of the Intralux Kove product family. **Kove LED Professional** is available in a range of configurations such as DALI/DSI dimmable, fixed output, HE and HO. **Kove LED Professional** has been designed to suit a very large range of indirect lighting projects and budgets.

LED Module Type	Tridonic / Philips
LED Module Wattage	HE: 9.8 HO: 18.1
Light Distribution	Semi-Asymmetric
LED Module Life	L70: 50,000 Hours
CRI	MIN 80
LED Colour (K)	2700 / 3000 / 4000
Fixture Lumens Per Meter*	HE: 1,936 HO: 3,200
Fixture Efficacy (lm/W)*	HE: 1100 HO: 99
Fixture Wattage Per Meter (W)	HE: 17.56 HO: 32.3
Max. Interconnected Run Length	60m****

Photometrics - Semi Asymmetric beam

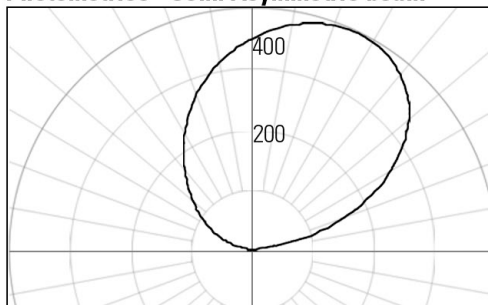

IES files available at www.intralux.com

Product Code	KLLED-P-112	KLLED-P-212	KLLED-P-512	KLLED-P-119	KLLED-P-219	KLLED-P-519
Actual Fixture Length (mm)	575mm	1135mm	2815mm	575mm	1135mm	2815mm
LED Module Configuration***	1 x 9.8W	2 x 9.8W	5 x 9.8W	1 x 18.1W	2 x 18.1W	5 x 18.1W
Fixture Lumens	1,123	2,246	5,615	1,856	3,713	9,282
Fixture Wattage	9.8W	19.6W	49W	18.1W	36.2W	90.5W
Fixture System Amps	0.05A	0.1A	0.25A	0.08A	0.16A	0.4A
Input Voltage	220-240V 50/60Hz					
Housing Material & Finish	Satin Black Anodized Aluminium					
Dimming	Fixed Output/DALI/DSI**					

* calculated data values only based on 4000K

** dimming range limited by driver manufacturer

*** Short 'infill module' of 295mm is available on a project basis.

****Dependant on module configuration and driver quantity & type.



Intralux Australia Pty Limited (ABN 70 010 644 694) 10/31 Acanthus Street, Darra, QLD 4076 Australia
 Tel: +61 7 3375 9333 Fax: +61 7 3375 9444 Email: info@intralux.com Web: www.intralux.com

Design and Trade Mark registrations pending. Intralux Products are designed and built to comply with appropriate International Standards. All brand names on this brochure are Trade Marks of their respective holders. Some of the images in this brochure are computer generated representations. Intralux Australia reserves the right to alter the designs and specifications of these products without notice.

20170220 E&OE

