SLITE LED - UNDERCABINET LIGHTING SYSTEM

DATE	October 2017	CODE	SLLED-T1-1-EU	B
PROJECT		TYPE		

Design Details

- measurements in mm

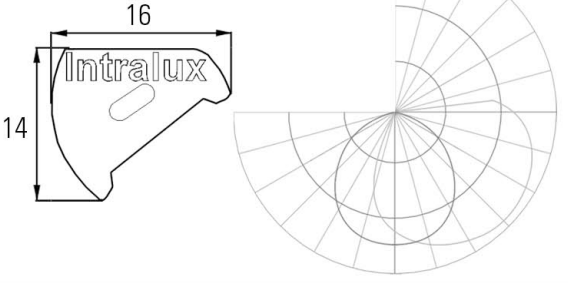

Slite LED is a modern redesign of the Slite family, built around high output LEDs. **Slite LED** incorporates remote driven, constant voltage LED systems in a a very small dimensional footprint. **Slite LED** has been design to provided specifically directed light for shelf and undercabinet retail lighting, minimising glare and visual obstruction. **Slite LED** is offered in >95 CRI, multiple CCTs and is available in a fixed or dimmable configuration.

Product Code Standard Product Interconnectable Product	SLLED-20-560 SLLEDS-20-560	SLLED-20-860 SLLEDS-20-860	SLLED-20-1160 SLLEDS-20-1160	SLLED-20-1460 SLLEDS-20-1460
Overall fixture length ****	560mm	860mm	1,160mm	1,460mm
Illuminated fixture length	550mm	850mm	1,150mm	1,450mm
Fixture Wattage (W)	11.0	17.0	23.0	29.0
Fixture Lumens*	750	1159	1,569	1,978
Fixture Lumens per metre*	963			
CRI	Min 95 (R9:98)			
LED colour (K)	2700 (27) / 3000K (30) / 4000K (40)			
LED Module Efficacy (lm/W)*	71			
Fixture wattage per metre (W)	20W/m			
LED Module increment (mm)	50mm			
Max. interconnected run (mm)**	5,000mm			
Viewing angle	120°			
LED Module Life (L70)	50,000 hours			
Housing material & finish	Satin Black Anodized (BA) / Clear Silver Anodized (SA) / Pearl White Powdercoat (W)			
Controls & Dimming ***	Fixed Output (F) / DALI, DSI, Switchdim (DALI) / 1-10V Analogue (D)			
Mounting Options	Adhesive Tape Backed / Clip-On Mounting Clips			

* Calculated data values only based on 4000K ** Based on central driver feed *** Dimming range limited by driver manufacturer **** Length including endcaps.
Note: Stainless Steel mounting clips (qty as per recommendation on install sheet) and 1m starter lead are supplied with each product.

Ordering Slite LED
and specification

SLLED-20-560-W-40-F

Product Code Length **Finish** Colour Temp **Control**

IP40 24V DC

Intralux Australia 10/31 Acanthus Street, Darra, QLD 4076 Australia
Tel: **+61 7 3375 9333** Fax: +61 7 3375 9444 Email: info@intralux.com Web: www.intralux.com

Design and Trade Mark registrations pending. Intralux Products are designed and built to comply with appropriate International Standards. All brand names on this brochure are Trade Marks of their respective holders. Some of the images in this brochure are computer generated representations. Intralux Australia reserves the right to alter the designs and specifications of these products without notice.

20171030 E&OE

5yr LIMITED WARRANTY

Certified System Quality ISO 9001 SAI GLOBAL