

Mounting

Location Pole Top - Vertical and/or horizontal
 Ingress Protection IP66
 Impact Resistance IK09

Electrical

Input Voltage 220-240V AC 50/60Hz
 NEMA 3 pin or 5 pin socket Yes. Supplied with Shorting Cap as standard.
 Input Cable Length 1000mm / 6000mm / 10 000mm / other lengths on request
 Electrical Insulation Class I as standard. Class II on request

Dimension

Width 215mm
 Height 72mm
 Weight 3.8 kgs
 Spigot Size Options 42mm / 60mm / 76mm

Light

| | 10W | 20W | 30W | 40W | 50W | 60W |
|---------------------------|----------|----------|----------|----------|----------|-----------|
| Luminaire Power (Typical) | 14W | 23W | 34W | 46W | 56W | 67W |
| Luminaire Lumens | 2020 lms | 3382 lms | 4949 lms | 6560 lms | 7819 lms | 9156 lms |
| LED Power (Typical) | 10W | 20W | 30W | 40W | 50W | 60W |
| LED Lumens | 2376 lms | 3978 lms | 5821 lms | 7715 lms | 9125 lms | 10769 lms |

#Lumens 70 CRI 4000K - Average


Colour Temperature

CRI 1800K / 2700K / 3000K / 4000K / PC Amber
 70+ (90+ CRI available on request)
 Beam Angle FS3 / T1-M / T2-M / SCL / T3-M / DWC / ME / T4 / T4-B / XW
 Binning (SDCM) 3
 LM-80/TM-21 Lifespan L95 > 55,000 hrs
 Max. Verified Ambient Temperature 50°C


SPECIFICATION CODE

| PRODUCT | OUTPUT | BEAM | FINISH | SPIGOT SIZE | COLOUR TEMPERATURE | DIMMING | INPUT CABLE LENGTH |
|-----------------|--|--|---|---|---|--|---|
| ANC | 60 | T2M | MB | 76 | 730 | NEMA3 | 10 |
| (ANC) Ancona | (10) 2020 lms (20) 3382 lms (30) 4949 lms (40) 6560 lms (50) 7819 lms (60) 9156 lms | (FS3) FS3 (T1M) T1-M (T2M) T2-M (SCL) SCL (T3M) T3-M (DWC) DWC (ME) ME (T4) T4 (T4B) T4-B (XW) XW | (MB) Metallic Black Powdercoat (MS) Metallic Silver Powdercoat (W) White Powdercoat (SP) Other | (42) - 42mm (60) - 60mm (76) - 76mm | (718) 70 CRI 1800K (727) 70 CRI 2700K (730) 70 CRI 3000K (740) 70 CRI 4000K (PC) PC Amber | (NEMA3) Non Dimmable (NEMA5) Dimmable | (1) 1m (6) 6m (10) 10m (SP) Custom |


PHOTOMETRIC DATA

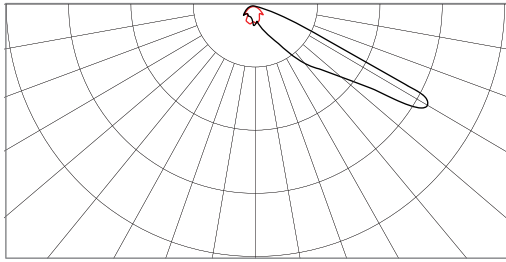


'FS3' Beam (FS3)

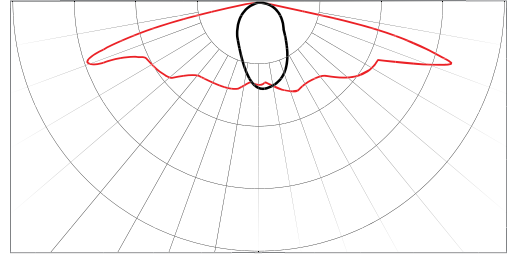


'T1-M' Beam (T1M)

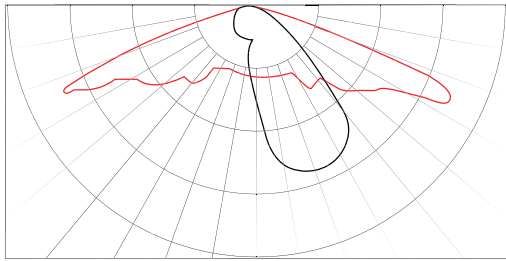


'T2-M' Beam (T2M)

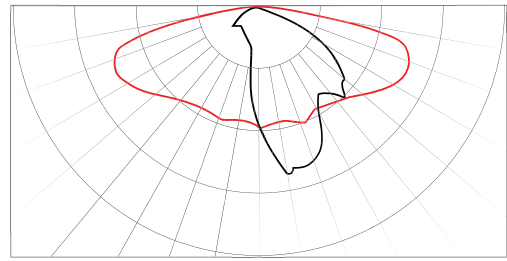


'SCL' Beam (SCL)

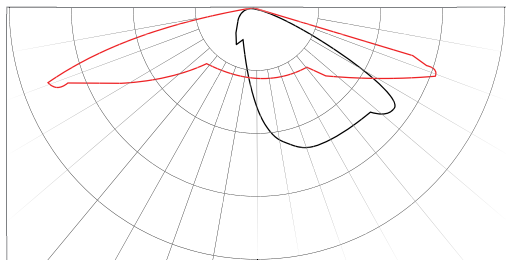


'T3-M' Beam (T3M)

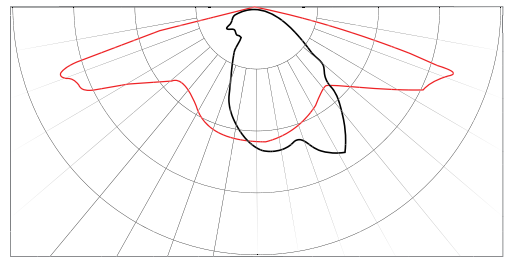


'DWC' Beam (DWC)

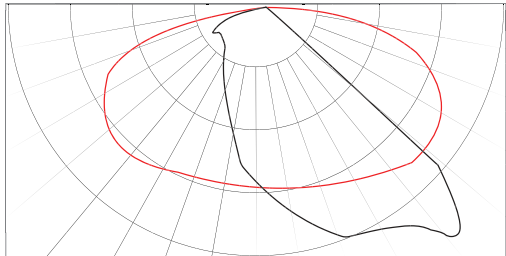


'ME' Beam (ME)

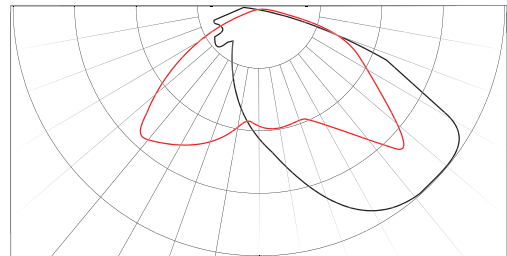

'T4' Beam (T4)

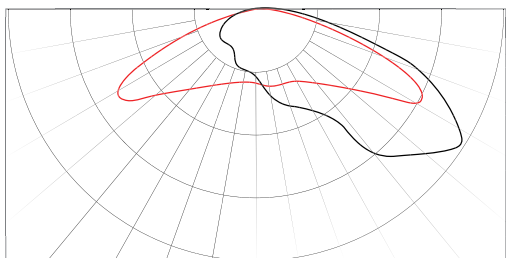

'T4-B' Beam (T4B)

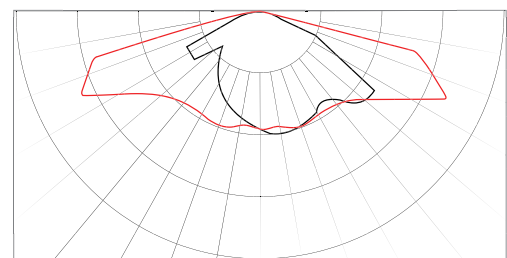

'XW' Beam (XW)

COMPLIANCE

EN 55015
AS/NZS CISPR15
IEC/EN 60598-1:
IEC/EN 60598-2-1:2014+A1:
AS 62262
NATA Certified IES Files upon request.

