


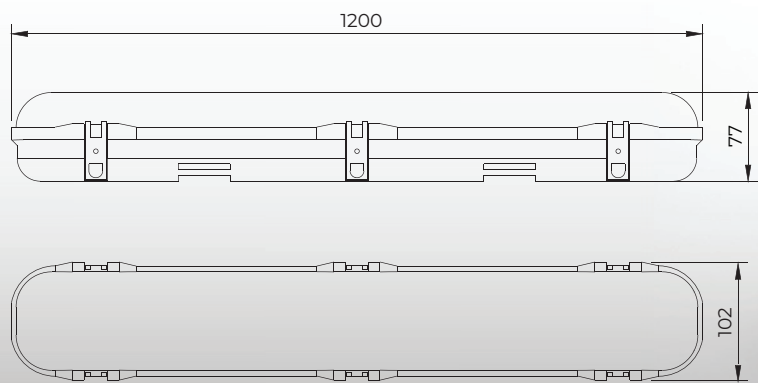


Mounting				
Location		Surface, Suspended		
Ingress Protection		IP65		
Impact Rating		IK10		
Electrical				
Input Voltage		220-240Vac 50/60Hz		
Dimming		Fixed Output, DALI & Push Dim		
Driver Location		Integral		
Dimension				
Size		1200mm x 102mm		
Height		77mm		
Weight		2.4kgs		
Light		27W	36W	45W
Luminaire Power (Typical)		30.1W	38.8W	50.2W
Luminaire Lumens		3438 lms	4596 lms	5558 lms
LED Power (Typical)		26.6W	35.6W	45.2W
LED Lumens		4118 lms	5504 lms	6656 lms
#Lumens based on 4000K luminaire				
Colour Temperature		3000K / 4000K		
CRI/R9		90 / 50+		
Beam Angle		100°		
Binning (SDCM)		3		
LM-90/TM-21 Lifespan		L90 B10 > 60,500 hours		
Max. Verified Ambient Temperature		40°C		

SPECIFICATION CODE




PRODUCT	WATTAGE	COLOUR TEMPERATURE	DIMMING
BTN-1200	27	930	DALI
	(27) 3438 lms (36) 4596 lms (45) 5558 lms	(930) 3000K (940) 4000K	(F) Fixed Output (DALI) DALI & Push Dim

COLOUR METRICS


3000K

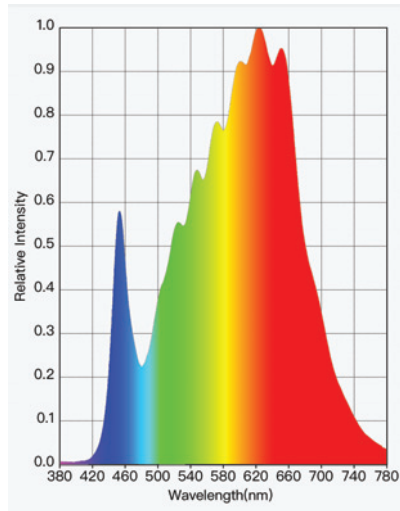

4000K

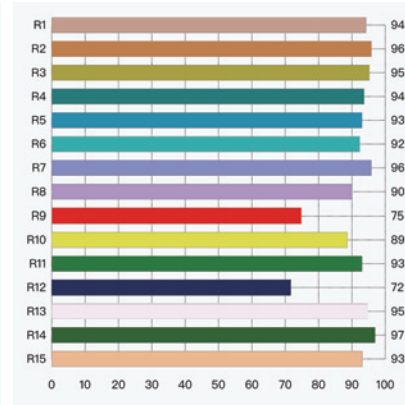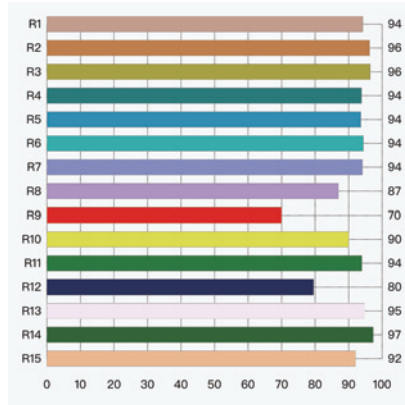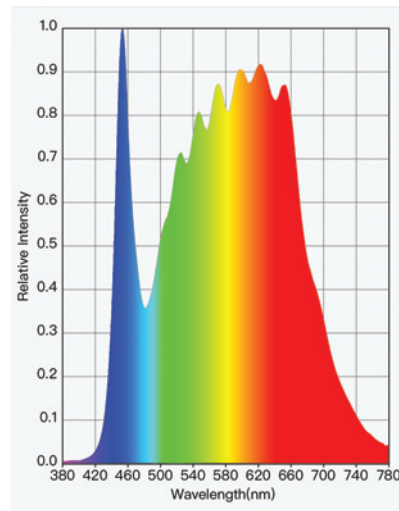

PHOTOMETRIC DATA

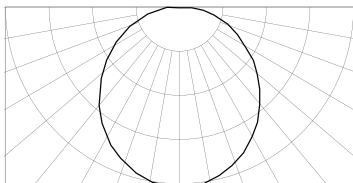

COMPLIANCE

EN 55015:2019+A11:2020
AS/NZS CISPR15:2017
IEC/EN 60598-1:2020
IEC/EN 60598-2-1:2014+A1:2015

