


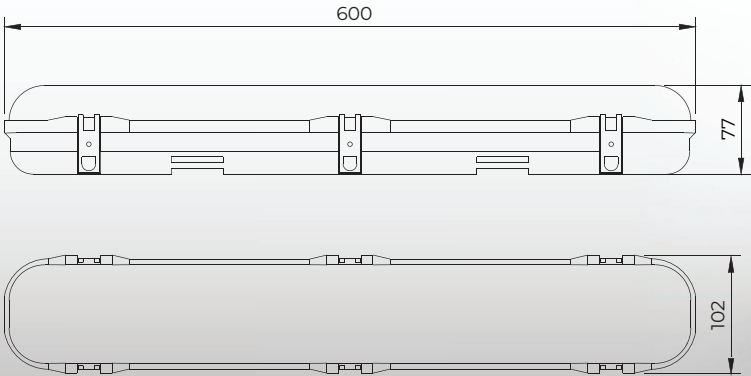

Mounting

Location	Surface, Suspended
Ingress Protection	IP65
Impact Rating	IK10

Electrical

Input Voltage	220-240Vac 50/60Hz
Dimming	Fixed Output, DALI & Push Dim
Driver Location	Integral

Dimension

Size	600mm x 102mm
Height	77mm
Weight	1.3kgs

Light

	13W	18W	22W
Luminaire Power (Typical)	17.1W	22.7W	25.6W
Luminaire Lumens	1719 lms	2298 lms	2779 lms
LED Power (Typical)	13.3W	17.8W	22.6W
LED Lumens	2059 lms	2752 lms	3328 lms

#Lumens based on 4000K luminaire

Colour Temperature	3000K / 4000K
CRI/R9	90 / 50+
Beam Angle	100°
Binning (SDCM)	3
LM-90/TM-21 Lifespan	L90 B10 > 60,500 hours
Max. Verified Ambient Temperature	40°C

SPECIFICATION CODE

PRODUCT
BTN-600

WATTAGE
18

(13) 1719 lms
(18) 2298 lms
(22) 2779 lms


COLOUR
TEMPERATURE
930

(930) 3000K
(940) 4000K




DIMMING
DALI
(F) Fixed Output
(DALI) DALI & Push Dim

COLOUR METRICS


3000K

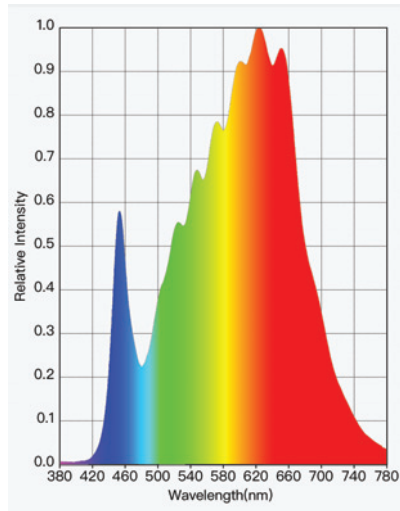

4000K

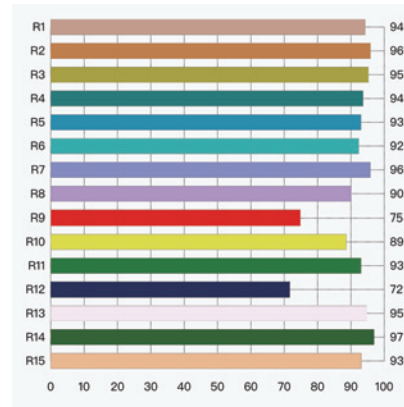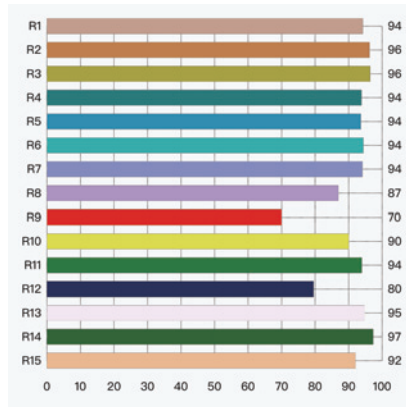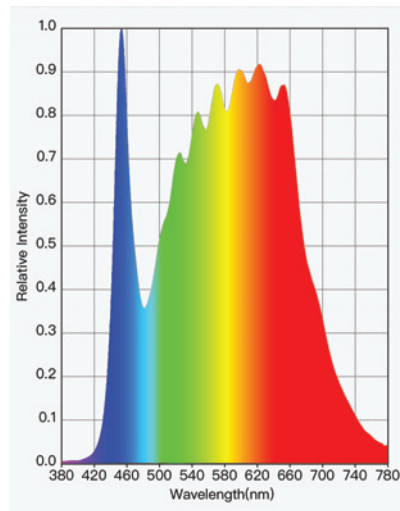

PHOTOMETRIC DATA

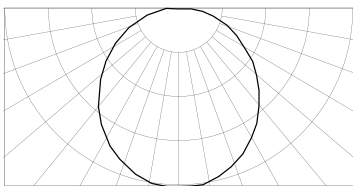

COMPLIANCE

EN 55015:2019+A11:2020
AS/NZS CISPR15:2017
IEC/EN 60598-1:2020
IEC/EN 60598-2-1:2014+A1:2015

