
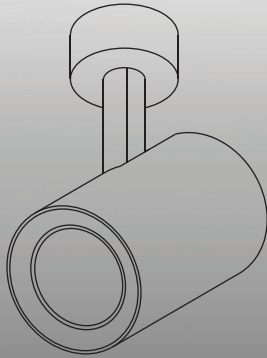


Intralux

Enepro Grow Spotlight Surface Mount


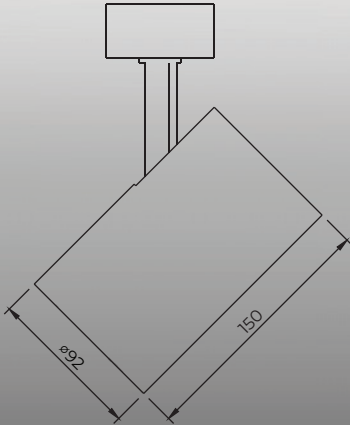


Mounting		
Location	Surface Mount	
Type	Mounting Bracket Supplied with Luminaire	
Ingress Protection	IP20	
Electrical		
Input Voltage	220-240Vac 50/60Hz	
Dimming	Fixed Output, DALI & Push Dim, Casambi	
Driver Location	Integral	
Dimension		
Length	150mm	
Diameter	92mm	
Weight	0.75kgs	
Light		
Luminaire Power (Typical)	22W	
Luminaire Lumens	24.3W	
LED Power (Typical)	2900 lms	
LED Lumens	21.6W	
#Lumens based on Medium Beam - 3500K	3405 lms	
Colour Temperature		3500K
CRI/R9		93 / 50+
Beam Angle		Narrow - 17° / Medium - 25° / Wide - 37° / Flood - 58° / Oval Horizontal Spread - 16°x67° / Oval Vertical Spread - 67°x16°
Binning (SDCM)		2
LM-80/TM-21 Lifespan		L90 B10 > 60,500 hours
Max. Verified Ambient Temperature		40°C
Plant Specific Data		
PPF Range (µmol/s)		20-255
Average Photon Efficiency (µmol/J)		2.2


SPECIFICATION CODE

PRODUCT	MODEL	WATTAGE	COLOUR TEMPERATURE	BEAM	FINISH	DIMMING
ENLEDG-XL	SM	22	935	F	BT	DALI
	(SM) Surface Mount	(22) 2900 lms	(935) 3500K	(N) Narrow - 17° (M) Medium - 25° (W) Wide - 37° (F) Flood - 58° (OHS) Oval Horiz - 16°x67° (OVS) Oval Vert- 67°x16°	(WT) White Texture (BT) Black Texture	(F) Fixed Output (DALI) DALI & Push Dim (CAS) Casambi


COLOUR METRICS

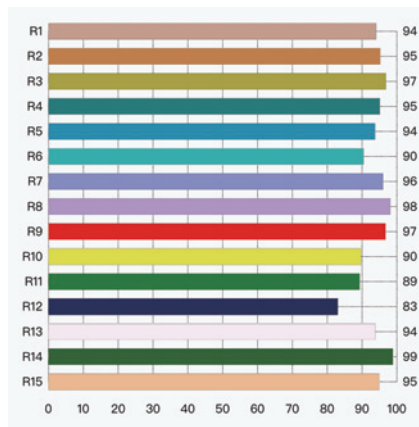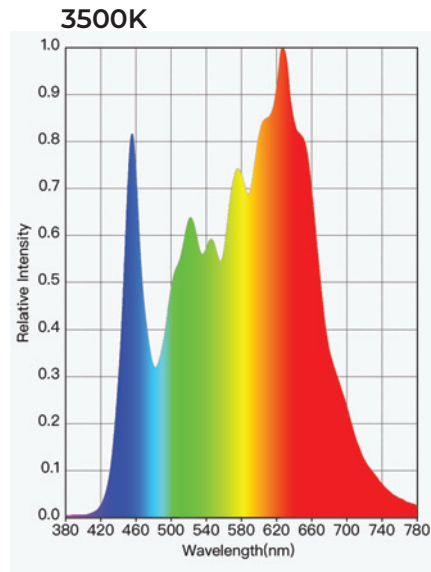


PHOTOMETRIC DATA

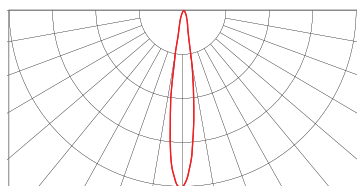


Narrow - 15° (N)

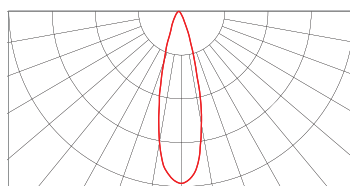


Medium - 25° (M)

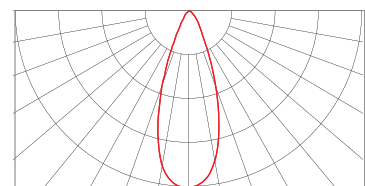

Wide - 37° (W)

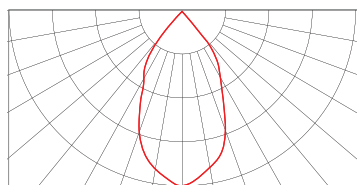

Flood - 55° (F)

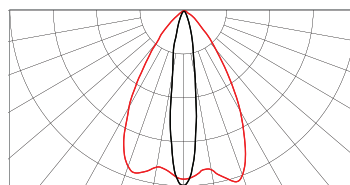

Oval - 16°x67° (O)

Note: When ordering Oval ensure to advise configuration:
OHS - Wide, Horizontal Beam
OVS - Narrow, Vertical Beam

COMPLIANCE

EN 55015:2019+A11:2020
AS/NZS CISPR15:2017
IEC/EN 60598-1:2020
IEC/EN 60598-2-1:2014+A1:2015



CASAMBI