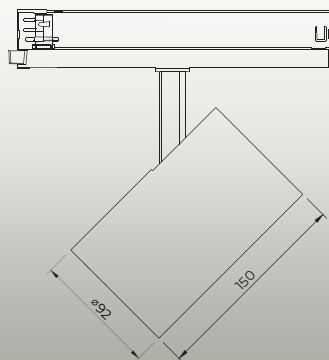


Mounting

Location
Ingress Protection

Track Mount
IP20

Electrical

Input Voltage
Dimming
Driver Location
Compatible Track Systems

220-240Vac 50/60Hz
Fixed Output, DALI & Push Dim, Casambi
Integral
Nordic Aluminium Global Trac Pulse: XTSC 6xxx, 3P+DALI / XTSCF 6xxx, 3P+DALI
Stucchi - One Track, 3P + DALI / Powergear PRO-0610, 3P+ DALI
Unipro: TC32W, 3P + DALI / TC32FW, 3P + DALI

Dimension

Length
Diameter
Weight

150mm
92mm
0.75kgs

Light

Luminaire Power (Typical)
Luminaire Lumens
LED Power (Typical)
LED Lumens
#Lumens based on Medium Beam - 3500K

22W
24.3W
2900 lms
21.6 W
3405 lms

Colour Temperature
CRI/R9
Beam Angle

3500K
93 / 50+
Narrow - 17° / Medium - 25° / Wide - 37° / Flood - 58° / Oval Horizontal Spread - 16°x67° /
Oval Vertical Spread - 67°x16°

Binning (SDCM)
LM-80/TM-21 Lifespan
Max. Verified Ambient Temperature

2
L90 B10 > 60,500 hours
40°C

Plant Specific Data

PPF Range (μmol/s)
Average Photon Efficiency (μmol/J)

20-255
2.2

Finishes

Outer
Snood
Track Adapter

White Texture / Black Texture / Bronze Texture / Metallic Silver / Metallic Gold
Black Anodized as standard
White. All luminaires in colours other than White will be supplied with Black Track Adapter.

SPECIFICATION CODE

PRODUCT
ENLEDG-XL

MODEL
TM
(TM)
Track Mount

WATTAGE
22
(22)
2900 lms



COLOUR
TEMPERATURE
935
(935) 3500K

BEAM
F
(N) Narrow - 17°
(M) Medium - 25°
(W) Wide - 37°
(F) Flood - 58°
(OHS) Oval Horiz - 16°x67°
(OVS) Oval Vert- 67°x16°


FINISH
BT
(WT) White Texture
(BT) Black Texture
(BRT) Bronze Texture
(MS) Metallic Silver
(MG) Metallic Gold

DIMMING
DALI
(F) Fixed Output
(DALI) DALI & Push Dim
(CAS) Casambi


COLOUR METRICS

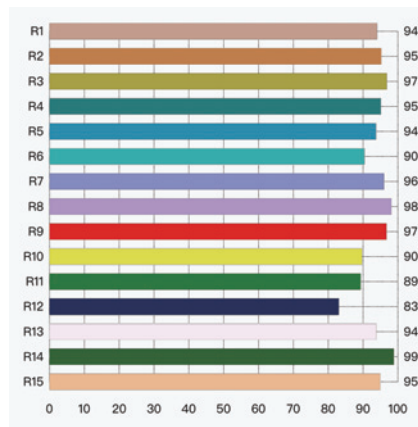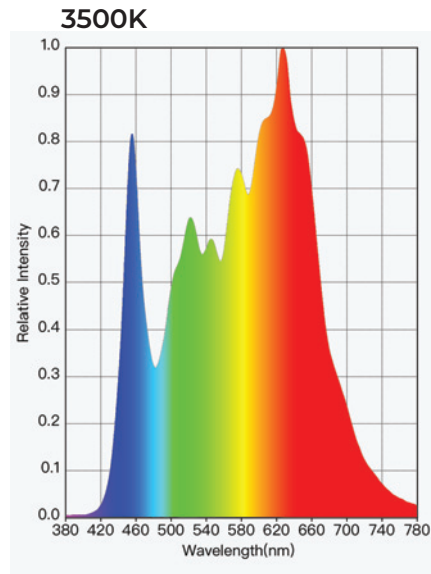


PHOTOMETRIC DATA

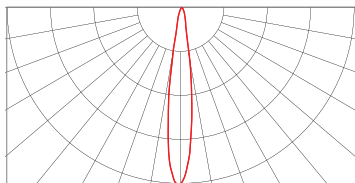


Narrow - 17° (N)

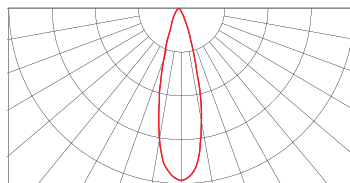


Medium - 25° (M)

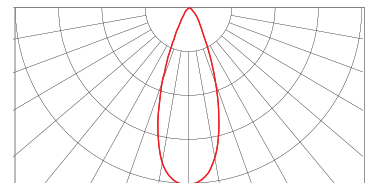

Wide - 37° (W)

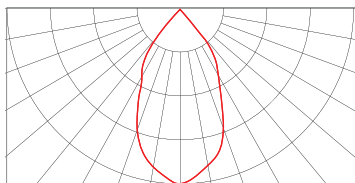

Flood - 58° (F)

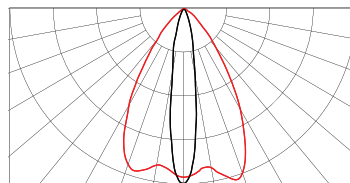

Oval - 16°x67° (O)

Note: When ordering Oval ensure to advise configuration:
OHS - Wide Horizontal Beam
OVS - Narrow, Vertical Beam

COMPLIANCE

EN 55015:2019+A11:2020
AS/NZS CISPR15:2017
IEC/EN 60598-1:2020
IEC/EN 60598-2-1:2014+A1:2015



CASAMBI