

### Mounting

Location	Surface
Type	Mounting Clip
Ingress Protection	IP40

### Electrical

Input Voltage	24V DC Constant Voltage
Dimming	Fixed Output, DALI & Push Dim, 1-10V, Casambi
Driver Location	Remote
Electrical Connection Type	Starter Lead
Starter Lead Length	3m
Interconnection Between Fixtures	Male / Female Factory Fitted Micro Connectors

### Dimension

Width	18mm
Height	15mm
Weight	0.2kgs/m
Maximum Single Luminaire Length	2.514m
Finished Fixture Length	LED Module increments + 14mm

### Light

	5W	10W	20W	RGBW	TW
LED Strip Power (Typical)	4.8W/m	7.9W/m	16.6W/m	25.2W/m	19.2W/m
Luminaire Lumens with Frosted Diffuser	271 lms/m	462 lms/m	916 lms/m	816 lms/m	1045 lms/m
Luminaire Lumens with Matte Diffuser	145 lms/m	247 lms/m	489 lms/m	436 lms/m	558 lms/m
#Lumen based on 4000K					

Colour Temperature 2400K / 2700K / 3000K / 4000K / RGBW / Tunable White

CRI 94 (Excl RGBW and TW)

LED Module Increments 50mm (RGBW = 71.5mm)

Beam Angle Symmetric

Binning (SDCM) 3

LM-80/TM-21 Lifespan L80 B10 > 50,000 hours

Max. Verified Ambient Temperature 40°C


Max. Interconnectable Run Length 5m

## SPECIFICATION CODE


PRODUCT	WATTAGE	MODEL	FINISH	LUMINAIRE LENGTH	COLOUR TEMPERATURE	DIMMING
<b>KLLED-M</b>	<b>5</b>	<b>C15F</b>	<b>BA</b>	<b>2514</b>	<b>930</b>	<b>DALI</b>
	(5) 4.8W/m (10) 7.9W/m (20) 19W/m (RGBW) RGBW (TW) Tunable White	(C15F) Frosted Diffuser (C15M) Matte Diffuser	(BA) Black Anodised as standard (BT) Black Texture (WT) White Texture (SP) Other	Run length in mm. Longer lengths than 2.5m can be supplied in Kit Form or as individual luminaires	(924) 2400K (927) 2700K (930) 3000K (940) 4000K (TW) Tunable White (RGBW) RGBW	(F) Fixed Output (DALI) DALI & Push Dim (1-10V) 1-10V Dimmable (CAS) Casambi

## COLOUR METRICS


2400K

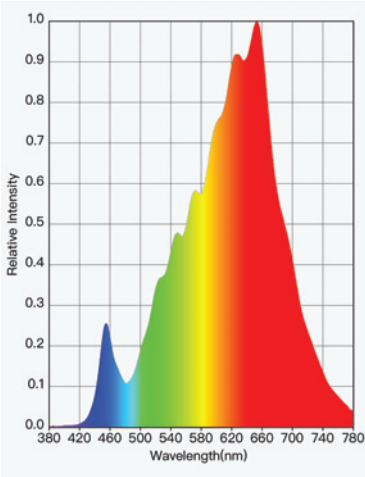




2700K

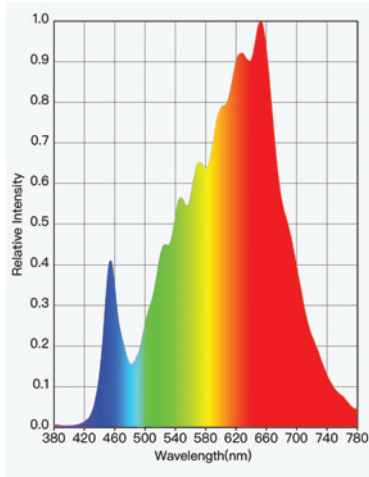


3000K

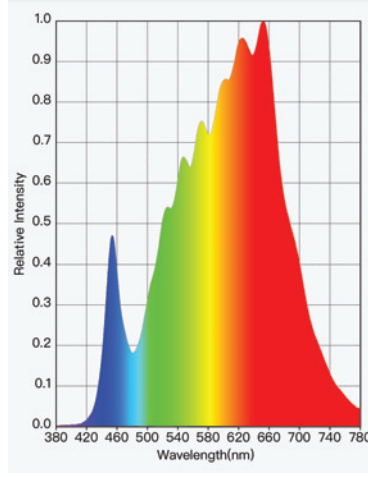


4000K

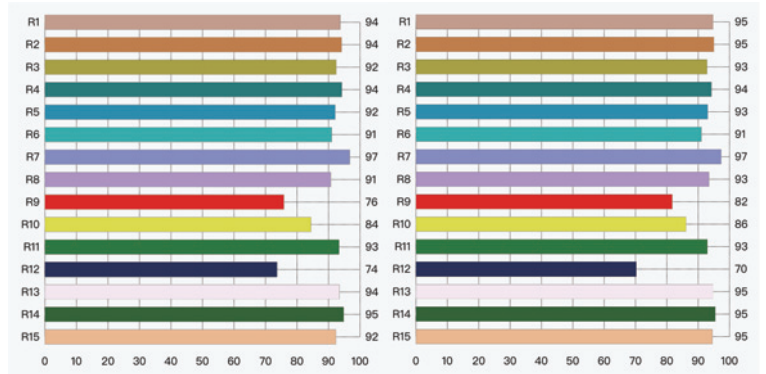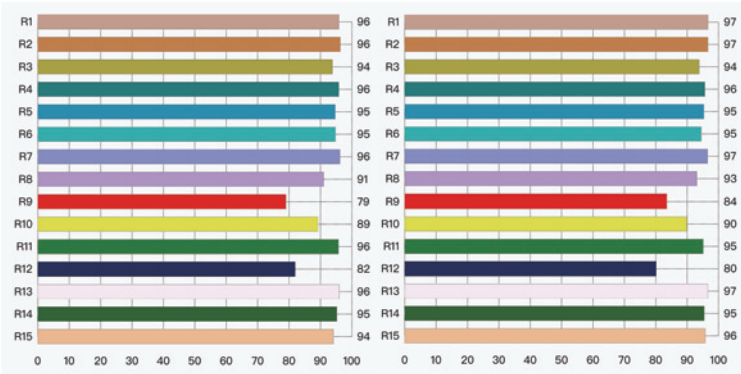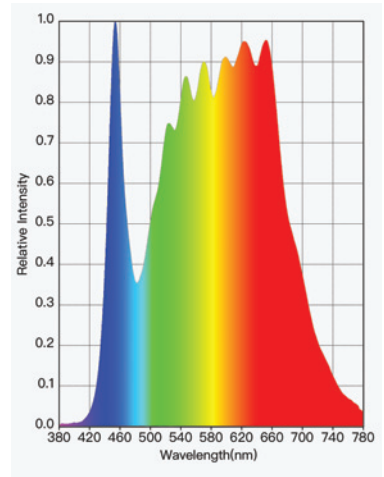

## PHOTOMETRIC DATA

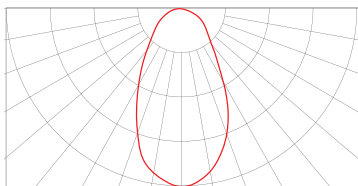

Frosted Diffuser (C15F)



Matte Diffuser (C15M)

## COMPLIANCE

EN 55015:2019+A11:2020  
 AS/NZS CISPR15:2017  
 IEC/EN 60598-1:2020  
 IEC/EN 60598-2-1:2014+A1:2015



CASAMBI