

Mounting		
Location	Wall	
Type	Surface Mount	
Ingress Protection	IP20	
Electrical		
Input Voltage	220-240Vac 50/60Hz	
Dimming	Fixed Output, DALI & Push Dim, Casambi, Phase Cut Dim	
Driver Location	Integral	
Dimension		
Width	240mm	
Height	46mm	
Depth	230mm	
Weight	1.2kgs	
Light	24W	36W
Luminaire Power (Typical)	27.6W	41.6W
Luminaire Lumens	2106 lms	3159 lms
LED Module Wattage	23.4W	36.2W
LED Module Lumens	3773 lms	5660 lms
#Lumens based on 3000K		
Colour Temperature	2700K / 3000K / 4000K	
CRI/R9	93 / 50+	
Beam Angle	Asymmetric forward throw beam	
Binning (SDCM)	2	
LM-80/TM-21 Lifespan	L90 B10 > 60,500 hours	
Max. Verified Ambient Temperature	40°C	

SPECIFICATION CODE

PRODUCT
KLLED-Z

MODEL
24

(24) 2106 lms
(36) 3159 lms

FINISH
WT

(WT) White Texture
(BT) Black Texture
(BRT) Bronze Texture
(MS) Metallic Silver
(MG) Metallic Gold

COLOUR
TEMPERATURE
930


(927) 2700K
(930) 3000K
(940) 4000K

DIMMING
DALI


(F) Fixed Output
(DALI) DALI & Push Dim
(CAS) Casambi
(PCD) Phase Cut Dim

COLOUR METRICS





2700K

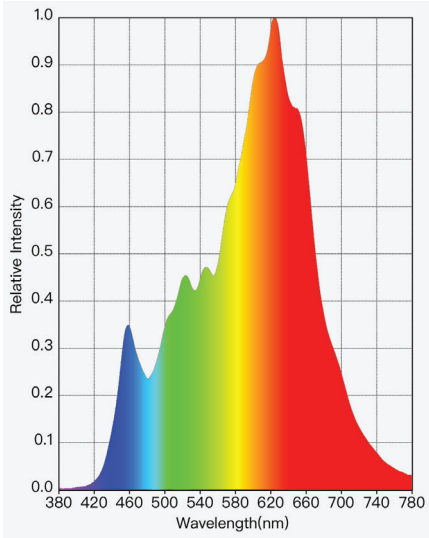


3000K

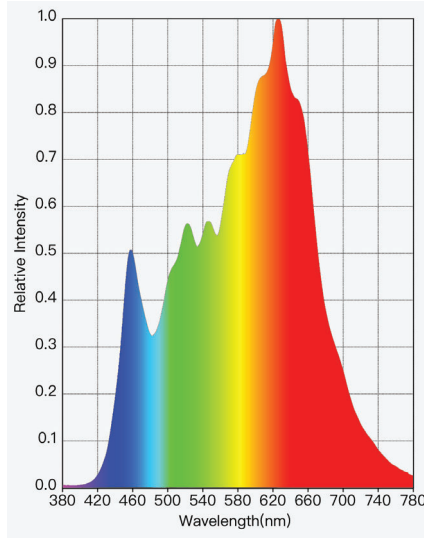

4000K

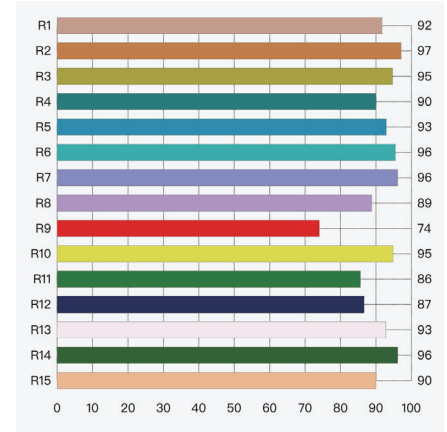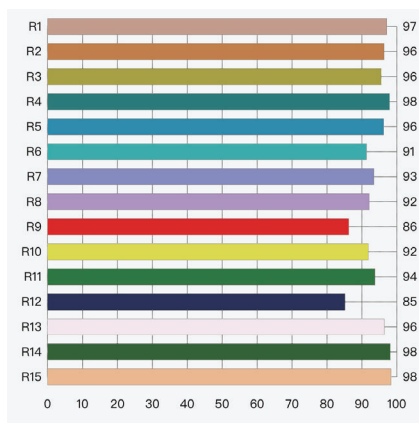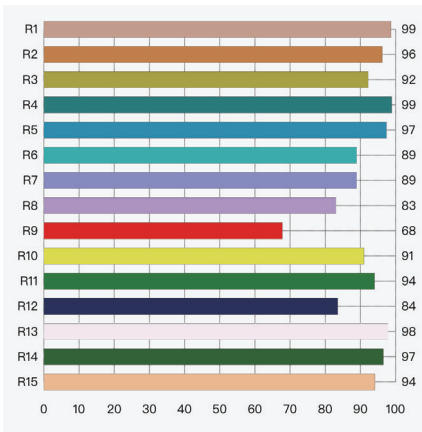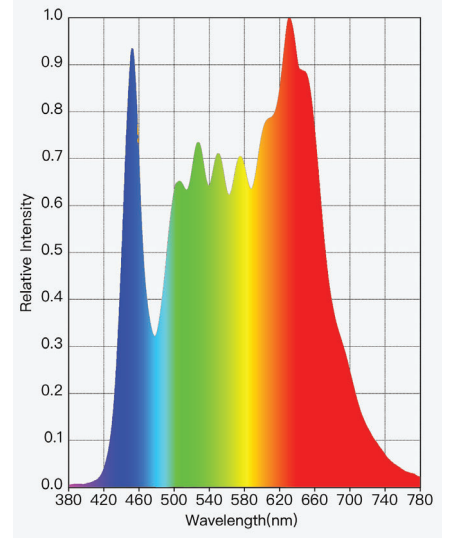

PHOTOMETRIC DATA

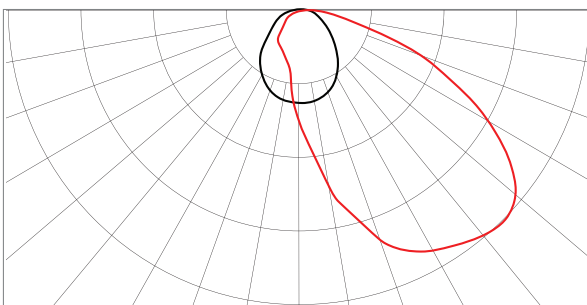

COMPLIANCE

EN 55015:2019+A11:2020
 AS/NZS CISPR15:2017
 IEC/EN 60598-1:2020
 IEC/EN 60598-2-1:2014+A1:2015



CASAMBI