

Mounting	
Location	Surface
Type	Mounting Clip (Optional)
Ingress Protection	IP40
Electrical	
Input Voltage	220-240V AC 50/60Hz
Dimming	DALI DT8
Driver Location	Integral
Electrical Connection Type	Plug+Go
Starter Lead Length	1000mm
Interconnection Between Fixtures	Yes
Dimension	
Width	68mm
Height	42mm
Weight	1.7kgs/m
Maximum Single Luminaire Length	2255mm
Finished Fixture Length	LED Module Increments + 15mm
Light	
Luminaire Power (Typical)	19W Module
Luminaire Lumens	32.1W/m 3200 lms/m
Colour Temperature	Tunable White (2700K to 6500K)
CRI/R9	90
LED Module Increments	280mm
Beam Angle	Asymmetric
Binning (SDCM)	3
LM-80/TM-21 Lifespan	L80 B10 > 72,000 hours
Max. Verified Ambient Temperature	40°C
Max. Interconnectable Run Length	60m (Dependant on module configuration)
Accessories:	
KLLED-SL-D	Kove LED 1m Starter Lead - Dimmable
KLLED-ELI-D	Kove LED 1m Extension Lead - Dimmable * Other lengths available
KLLED-T-MC1	Kove LED Tunable Mounting Clip (EA)

SPECIFICATION CODE

PRODUCT
KLLED-T

FINISH
BA

(BA) Black Anodised as standard
(PW) Pearl White
(SP) Other

LUMINAIRE
LENGTH
2255

Fitting length in mm.

COLOUR
TEMPERATURE
TW



(TW) 2700K to 6500K

DIMMING
DALIDT8



(DALIDT8)
DALI DT8 Dimmable

COLOUR METRICS


2700K

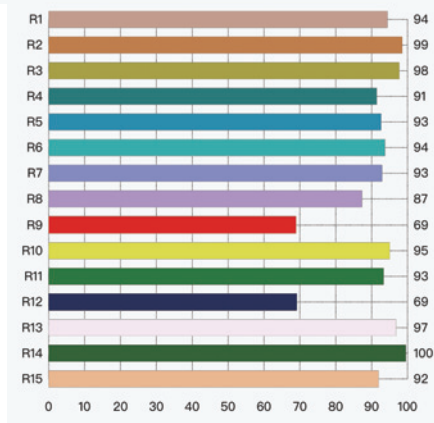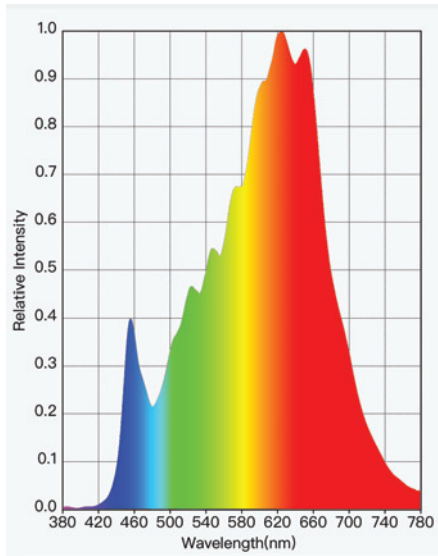

6500K

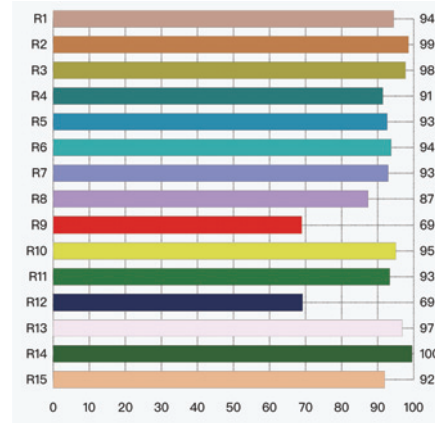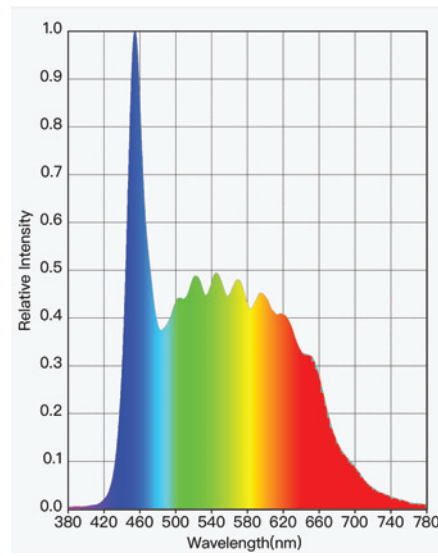

PHOTOMETRIC DATA

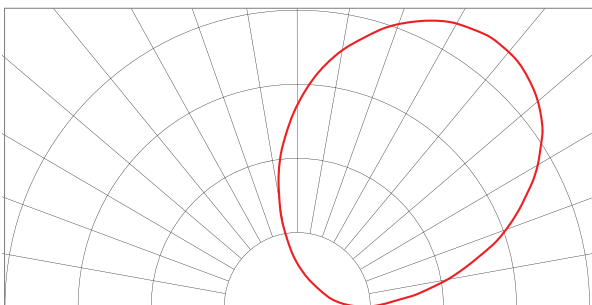

COMPLIANCE

EN 55015:2019+A11:2020
 AS/NZS CISPR15:2017
 IEC/EN 60598-1:2020
 IEC/EN 60598-2-1:2014+A1:2015



CASAMBI