


Mounting				
Location	Surface			
Type	Aluminium profile (straight runs) or aluminium mounting clips (curved runs)			
Ingress Protection	IP65			
Electrical				
Input Voltage	24V DC Constant Voltage			
Dimming	Fixed Output, DALI & Push Dim, 1-10V, Casambi			
Driver Location	Remote			
Electrical Connection Type	Flying Lead			
Starter Lead Length	500mm			
Dimension				
Width (including mounting clip)	14.4mm			
Height (including mounting clip)	19mm			
Weight	0.3kgs/m			
Maximum Single Luminaire Length	10m			
Finished Fixture Length (Top Outlet)	LED Module increments + 5mm			
Finished Fixture Length (Side Outlet)	LED Module increments + 5mm			
Light		5W	10W	15W
LED Strip Power (Typical)	5W/m	10W/m	15W/m	
LED Strip Power (Max)	5.5W/m	11W/m	16.5W/m	
Luminiare Lumens	310 lms/m	470 lms/m	702 lms/m	
#Lumens based on 4000K				
Colour Temperature	2400K / 2700K / 3000K / 4000K			
CRI	90			
LED Module Increments	50mm			
Beam Angle	Symmetric			
Binning (SDCM)	3			
LM-80/TM-21 Lifespan	L80 B10 > 50,000 hours			
Max. Verified Ambient Temperature	30°C			
Max. Interconnectable Run Length - Single Feed	10m (For 5W / 10W), 5m (For 15W/m)			
Max. Interconnectable Run Length - Dual Feed	20m(For 5W/10W), 10m (For 15W/m)			

SPECIFICATION CODE

PRODUCT	BEND TYPE	WATTAGE	LUMINAIRE LENGTH	POWER ENTRY	COLOUR TEMPERATURE	DIMMING
XFLED	1	10	6000	S	930	DALI
	(1) Type 1 - Side Bend	(5) 5W/m (10) 10W/m (15) 15W/m	Run length in mm.	(T) Top Output (S) Side Output - Right (B) Bottom Output	(924) 2400K (927) 2700K (930) 3000K (940) 4000K	(F) Fixed Output (DALI) DALI & Push Dim (1-10V) 1-10V Dimmable (CAS) Casambi

PHOTOMETRIC DATA



*IES files available at Intralux.com

COMPLIANCE

EN 55015:2019+A11:2020
AS/NZS CISPR15:2017
IEC/EN 60598-1:2020
IEC/EN 60598-2-1:2014+A1:2015




CASAMBI

WIRE EXIT DETAIL



Top Output

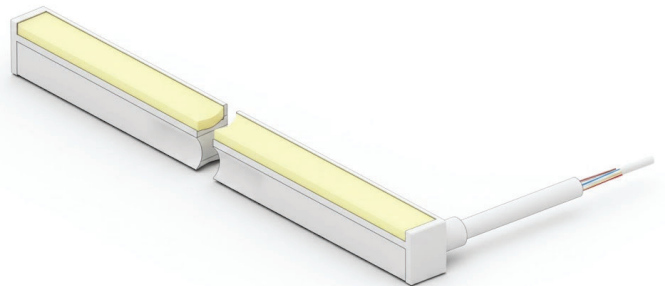

Side Output



Bottom Output