


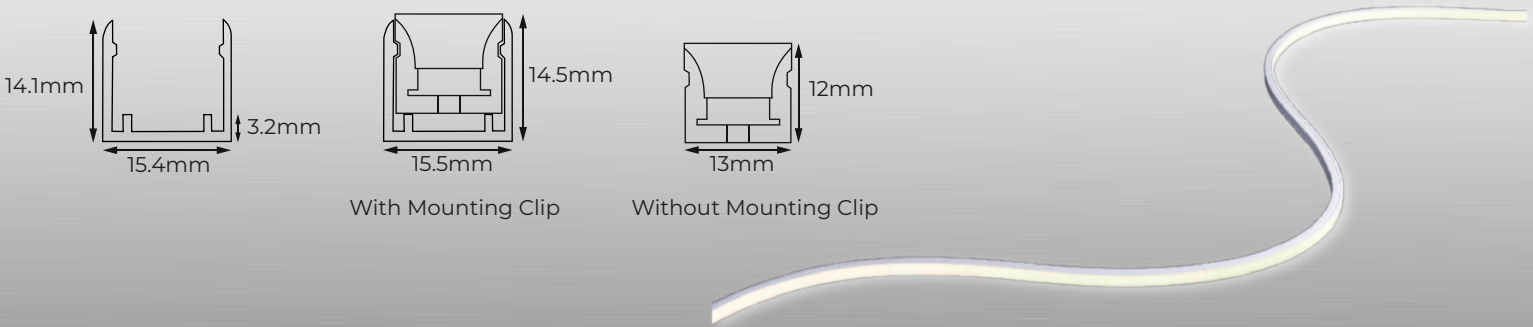


Mounting	
Location	Surface
Type	Aluminium profile (straight runs) or aluminium mounting clips (curved runs)
Ingress Protection	IP65
Electrical	
Input Voltage	24V DC Constant Voltage
Dimming	Casambi, DALI DT6/8, DMX
Driver Location	Remote
Electrical Connection Type	Flying Lead
Starter Lead Length	500mm
Dimension	
Width (including mounting clip)	15.5mm
Height (including mounting clip)	14.5mm
Weight	0.3kgs/m
Maximum Single Luminaire Length	10m
Finished Fixture Length (Top Outlet)	LED Module increments + 5mm
Finished Fixture Length (Side Outlet)	LED Module increments + 5mm
Light	
LED Strip Power (Typical)	13.2W/m
Luminaire Lumens	135 lms/m (2700K) / 160 lms/m (3000K) / 165 lms/m (4000K)
Colour Temperature	Red / Green / Blue / White (2700K or 3000K or 4000K)
LED Module Increments	83.3mm
Beam Angle	Symmetric
Binning (SDCM)	3
LM-80/TM-21 Lifespan	L80 B10 > 50,000 hours
Max. Verified Ambient Temperature	30°C
Max. Interconnectable Run Length - Single Feed	5m
Max. Interconnectable Run Length - Dual Feed	10m

SPECIFICATION CODE

PRODUCT	BEND TYPE	WATTAGE	LUMINAIRE LENGTH	POWER ENTRY	COLOUR TEMPERATURE	DIMMING
XFLED	2	10	6000	T	RGBW27	DALIDT8
	(2) Type 2 - Top Bend	(12) 13.2 W/m	Run length in mm.	(S) Side Entry (B) Bottom Entry (T) Top Entry	(RGBW27) 2700K (RGBW30) 3000K (RGBW40) 4000K	(CAS) Casambi (DALIDT6) DALI DT6 (DALIDT8) DALI DT8 (DMX) DMX

PHOTOMETRIC DATA

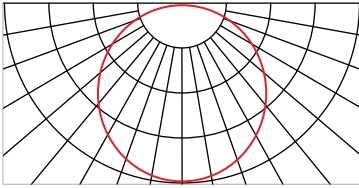

*IES files available at Intralux.com

COMPLIANCE



EN 55015:2019+A11:2020
AS/NZS CISPR15:2017
IEC/EN 60598-1:2020
IEC/EN 60598-2-1:2014+A1:2015




CASAMBI

WIRE EXIT DETAIL

Bottom Entry

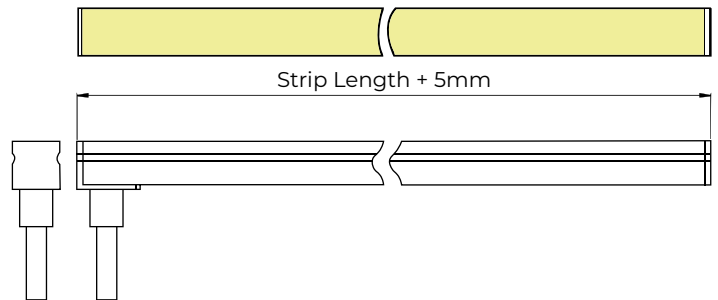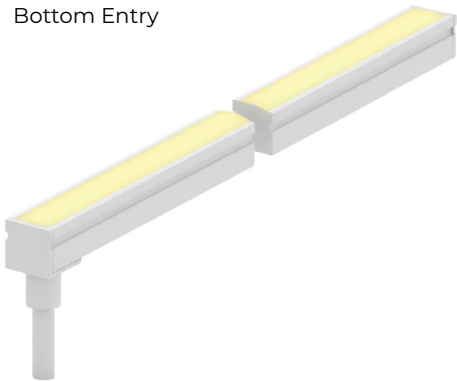

Side Entry

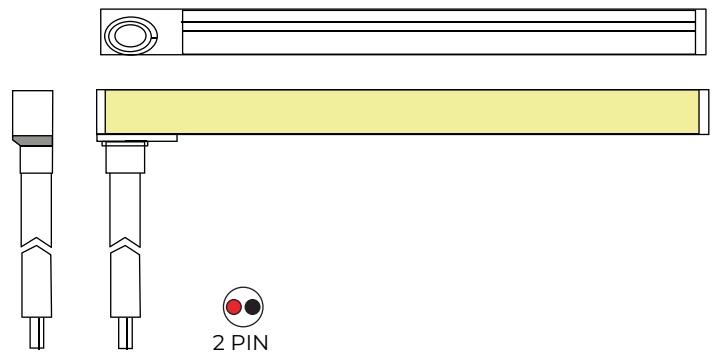

Top Entry

