


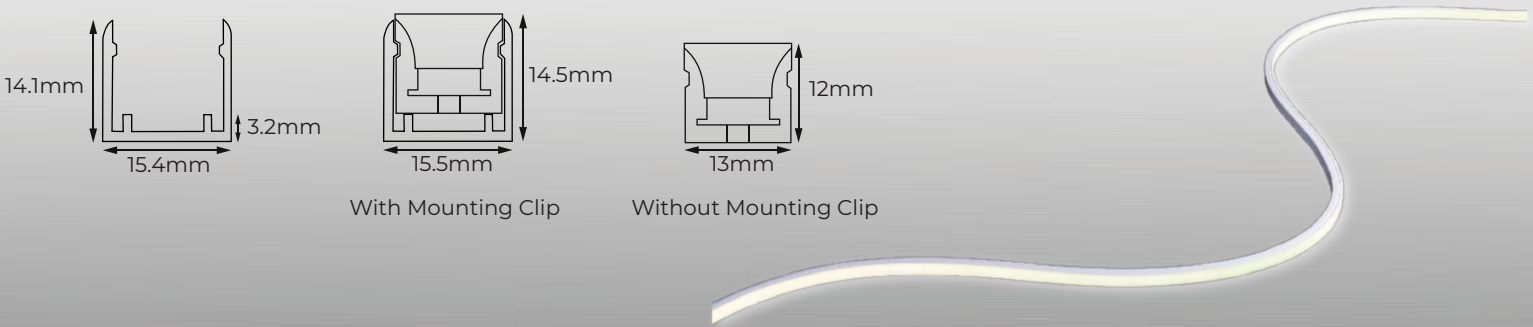


Mounting	
Location	Surface
Type	Aluminium profile (straight runs) or aluminium mounting clips (curved runs)
Ingress Protection	IP65
Electrical	
Input Voltage	24V DC Constant Voltage
Dimming	Fixed Output, DALI & Push Dim, 1-10V, Casambi
Driver Location	Remote
Electrical Connection Type	Flying Lead
Starter Lead Length	500mm
Dimension	
Width (including mounting clip)	15.5mm
Height (including mounting clip)	14.5mm
Weight	0.3kgs/m
Maximum Single Luminaire Length	10m
Finished Fixture Length (Top Outlet)	LED Module increments + 5mm
Finished Fixture Length (Side Outlet)	LED Module increments + 5mm
Light	
LED Strip Power (Typical)	9.6W/m
Luminaire Lumens	840 lms/m
#Lumens based on 4000K	
Colour Temperature	2400K / 2700K / 3000K / 4000K
CRI	90
LED Module Increments	50mm
Beam Angle	Symmetric
Binning (SDCM)	3
LM-80/TM-21 Lifespan	L80 B10 > 50,000 hours
Max. Verified Ambient Temperature	30°C
Max. Interconnectable Run Length - Single Feed	10m
Max. Interconnectable Run Length - Dual Feed	20m

SPECIFICATION CODE

PRODUCT	BEND TYPE	WATTAGE	LUMINAIRE LENGTH	POWER ENTRY	COLOUR TEMPERATURE	DIMMING
XFLED	2	10	6000	T	930	DALI
	(2) Type 2 - Top Bend	(10) 9.6W/m	Run length in mm.	(S) Side Entry (B) Bottom Entry (T) Top Entry	(924) 2400K (927) 2700K (930) 3000K (940) 4000K	(F) Fixed Output (DALI) DALI & Push Dim (1-10V) 1-10V Dimmable (CAS) Casambi

PHOTOMETRIC DATA

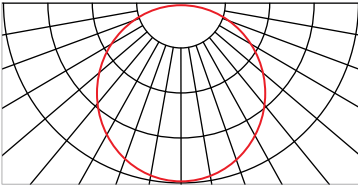

*IES files available at Intralux.com

COMPLIANCE



EN 55015:2019+A11:2020
AS/NZS CISPR15:2017
IEC/EN 60598-1:2020
IEC/EN 60598-2-1:2014+A1:2015




CASAMBI

WIRE EXIT DETAIL

Bottom Entry

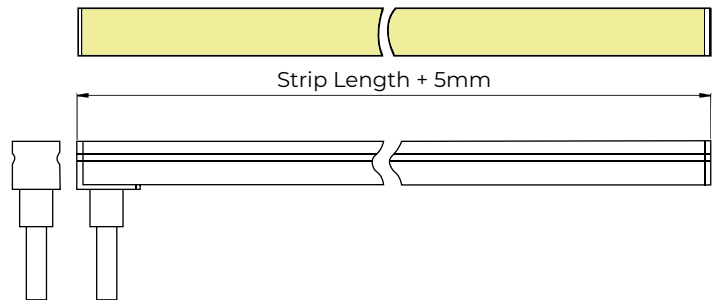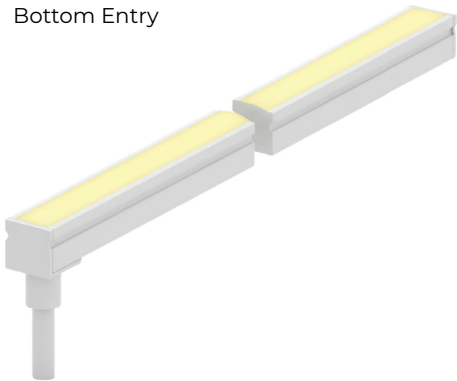

Side Entry

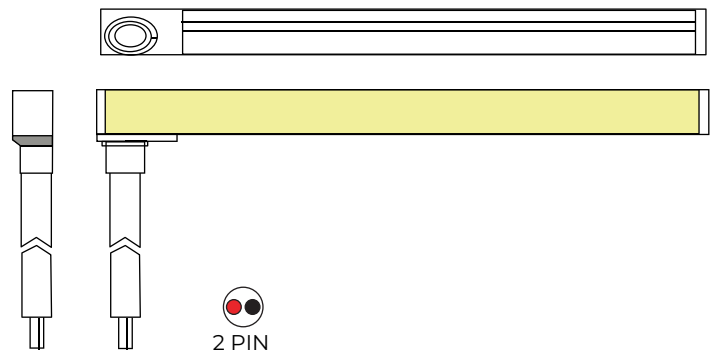

Top Entry

